

Product Readme for Xerox B225/B230/B235/B305/B310/B315/B410 C230/C235/C310/C315/C410 General Release xxxxx.230.09x

Release Date: July 2nd, 2024

dc24rn4196

Device Software Release Details

Note: Read Section II Installation instructions before upgrading the device.

Product	Bridge Software	EC3.5 software link
Xerox® B225/B235	MXLSG.230.090	MXLSG.230.091
Xerox® B230	MSLSG.230.090	MSLSG.230.091
Xerox® B305/B315	MXLBD.230.090	MXLBD.230.091
Xerox® B310	MSLBD.230.090	MSLBD.230.091
Xerox® B410	MSTSN.230.091	MSTSN.230.092
Xerox® C230	CSLBL.230.090	CSLBL.230.091
Xerox® C235	CXLBL.230.090	CXLBL.230.091
Xerox® C310	CSNZJ.230.092	CSNZJ.230.093
Xerox® C315	CXTZJ.230.092	CXTZJ.230.093
Xerox® C410	CSTGV.230.091	CSTGV.230.092

I. Fixes/Features new in this release

Features

- Improvements to support print driver status (Bi-Di) communications.
 - Improvements for Microsoft Universal Print.
 - Improvements with Xerox Easy Assist (XEA) application.
 - Improvement to SMTP Test communication for Email Setup. See admin guide.
 - Local Account usernames are no longer case sensitive.
 - Print support for Arabic and Hebrew Fonts.
 - Ability to configure email to "Split Job by Pages". See admin guide.
-

- Black Cartridge Status Bar at local UI is easier to see.
- New feature that allows each tray to support a Universal (custom) size called "Multiple Universal Size". See admin guide.
- Improvement to Chinese Font support for UI display and internal report printing.
- New feature that allows a job to be canceled if there is an error such as a paper jam or add paper called "Automatic Deletion of Suspended Print Jobs".
- Firmware downgrade is no longer supported.

Various Bug Fixes

- Change to handle SNMP community names up to 32 characters.
- Serial number changing to ABC123 after Controller Board Replacement has been fixed in this version.

II. Installation Notes

Install instructions are included in the zip file containing firmware. Unzip and download before attempting to install the firmware.

Upgrade Instructions

Caution:

- EC3.5 upgrade depends on how (or if) the "Admin" account has been setup in the device.
- If the Admin account was setup in the device using the Install Wizard, then the device would have changed settings that will prevent upgrading the device directly to EC3.5 version. In this case, please install the Bridge version first and then upgrade to the EC3.5 230.xxx (or higher) version.


Note: If you try upgrading the device to EC3.5 directly without the Bridge version, you will get an "Upload Failed [0]" error. Device will restart and come up with the original version in the device.

- If the Admin account is NOT setup in the device using Install Wizard, then the device can be directly upgraded to EC3.5 230.xxx version.
-

Note:

To install EC3.5, Import/ Export All Settings must be enabled.

- From EWS go to Settings→ Security → Manage Permissions→ Access Controls → Device Management -> “Import/ Export All Settings”
- From LUI go to Settings→ Security → Login Methods → Manage Permissions → Device Management -> “Import/ Export All Settings”

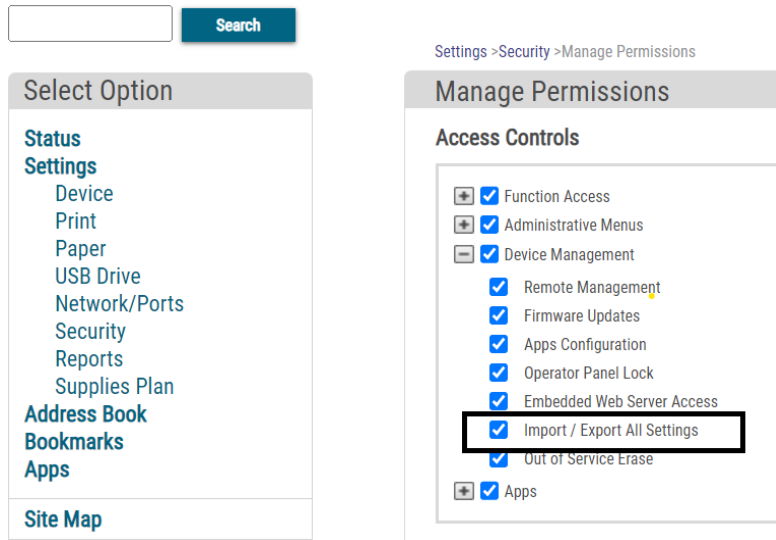

Downgrade Instructions:

Devices at Firmware level XXXXX.230.XXX or higher cannot be downgraded. If you attempt to downgrade you will receive a “Cannot Downgrade Error” message.