Xerox® ColorQube® 8700 / 8900 Software Identification

Release Date: May 1, 2013

ALERT ! A new software version of the ColorQube 8700 / 8900 is now available with ConnectKey Technology. The new model uses a different firmware file than the previous model. You must download the correct file to match the model of your machine and the resulting model you desire. For more information about ConnectKey please visit www.xerox.com/connectkey

STEP 1: Determine the Current System Software Version

You can determine the current system software version at the machine and at your workstation.

To determine the current system software version at the machine:

A. Press the **Machine Status** button.

B. Note the **System Software Version**.

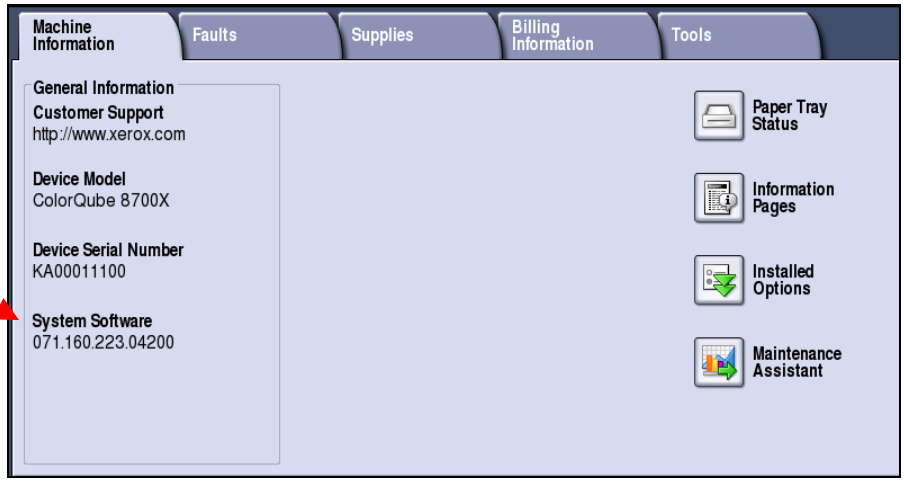

To determine the current system software version from your PC or workstation:

1. Open your web browser. In the Address or Location field enter the IP address o f the machine. Press **Enter**.
2. Select the **Status** tab.
3. Select the **Configuration Report**
4. Scroll down to the **Software Versions** section to see the **System Software** version.

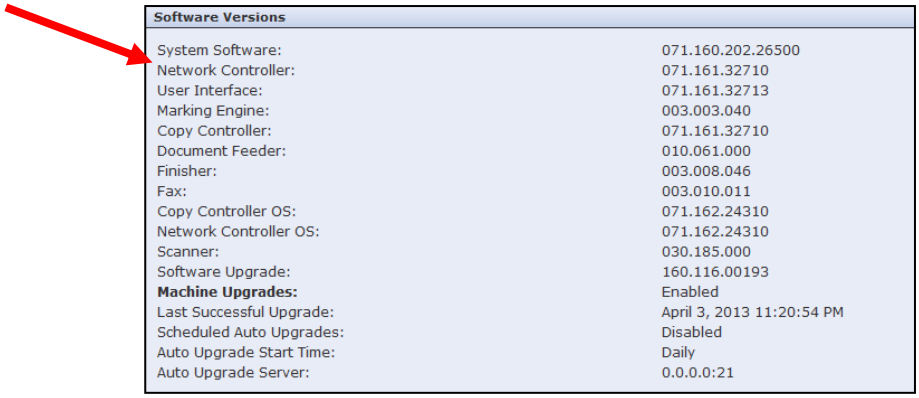

Software Versions	
System Software:	071.160.202.26500
Network Controller:	071.161.32710
User Interface:	071.161.32713
Marking Engine:	003.003.040
Copy Controller:	071.161.32710
Document Feeder:	010.061.000
Finisher:	003.008.046
Fax:	003.010.011
Copy Controller OS:	071.162.24310
Network Controller OS:	071.162.24310
Scanner:	030.185.000
Software Upgrade:	160.116.00193
Machine Upgrades:	Enabled
Last Successful Upgrade:	April 3, 2013 11:20:54 PM
Scheduled Auto Upgrades:	Disabled
Auto Upgrade Start Time:	Daily
Auto Upgrade Server:	0.0.0.0:21

STEP 2: Determine which file to Download

Use the following table to determine which file to download according to the version you are running and outcome you wish to achieve.

If the System Software version starts with:	Then the model you have is the:	Action you wish to take is:	Use this link to download the current software:
071.160.xxx.xxxxx	Previous Model 8700 / 8900	Upgrade to the new **ConnectKey** software.	Read important information about the **ConnectKey upgrade process below.** **Note:** Read Installation Instructions first before starting the upgrade process. **Upgrade instructions**: Upgrade to ConnectKey V071.161.203.09300
071.160.xxx.xxxxx	Previous Model 8700 / 8900	Update your system to the latest firmware (not ConnectKey)	CQ_8700.8900_V071.160.202.26500
071.161.xxx.xxxxx	ConnectKey 8700/8900	Update your ConnectKey system to the latest ConnectKey firmware **Note**: this software will NOT load on previous model machines.	Use this link only if you already have a ConnectKey device: CQ_8700.8900_CK_V071.161.203.09300

Upgrading to the New ConnectKey Model

If the System Software version starts with 071.160.xxx.xxxx and you want to upgrade to 071.161.xxx.xxxx, you must complete a special upgrade process. The special upgrade process **requires an empty USB Flash drive, 2Gb to 8Gb capacity**, and generally **takes 1 to 2 hours to complete**. The special upgrade instructions can be found at <link>.

For information about the additional features included in the upgrade go to www.xerox.com/ConnectKey.

ALERT: If you upgrade to a ConnectKey Model, do not downgrade to a non-ConnectKey firmware version without following the correct process. Contact Xerox Customer Support if you need to downgrade to a previous, non-ConnectKey model.

© 2013 Xerox Corporation. All rights reserved. XEROX®, XEROX and Design®, and ColorQube™ are trademarks of Xerox Corporation in the United States and/or other countries.