

THE DOCUMENT COMPANY

XEROX®



Phaser® 7300
Color Printer

Support Guide



Tektronix

COLOR PRINTERS BY

XEROX

Copyright © 2002, Xerox Corporation. All Rights Reserved. Unpublished rights reserved under the copyright laws of the United States. Contents of this publication may not be reproduced in any form without permission of Xerox Corporation.

Copyright protection claimed includes all forms of matters of copyrightable materials and information now allowed by statutory or judicial law or hereinafter granted, including without limitation, material generated from the software programs which are displayed on the screen such as styles, templates, icons, screen displays, looks, etc.

XEROX®, The Document Company®, the stylized X, CentreWare®, DocuPrint®, Made For Each Other®, Phaser®, PhaserShare®, the TekColor® icon, and WorkSet® are registered trademarks of Xerox Corporation. infoSMART™, PhaserPort™, PhaserPrint™, PhaserSMART™, PhaserSym™, PhaserTools™, and the TekColor™ name are trademarks of Xerox Corporation.

Adobe®, Acrobat®, Acrobat® Reader®, Illustrator®, PageMaker®, Photoshop®, PostScript®, ATM®, Adobe Garamond®, Birch®, Carta®, Mythos®, Quake®, and Tekton® are registered trademarks and Adobe Jenson™, Adobe Brilliant Screens™ technology, and IntelliSelect™ are trademarks of Adobe Systems Incorporated or its subsidiaries which may be registered in certain jurisdictions.

Apple®, LaserWriter®, LocalTalk®, Macintosh®, Mac® OS, AppleTalk®, TrueType2®, Apple Chancery®, Chicago®, Geneva®, Monaco®, and New York® are registered trademarks, and QuickDraw™ is a trademark of Apple Computer Incorporated.

Marigold™ and Oxford™ are trademarks of AlphaOmega Typography.

Avery™ is a trademark of Avery Dennison Corporation.

PCL® and HP-GL® are registered trademarks of Hewlett-Packard Corporation.

Hoefer Text was designed by the Hoefer Type Foundry.

ITC Avant Guard Gothic®, ITC Bookman®, ITC Lubalin Graph®, ITC Mona Lisa®, ITC Symbol®, ITC Zapf Chancery®, and ITC Zapf Dingbats® are registered trademarks of International Typeface Corporation.

Bernhard Modern™, Clarendon™, Coronet™, Helvetica™, New Century Schoolbook™, Optima™, Palatino™, Stempel Garamond™, Times™, and Univers™ are trademarks of Linotype-Hell AG and/or its subsidiaries.

MS-DOS® and Windows® are registered trademarks of Microsoft Corporation.

Wingdings™ in TrueType® format is a product of Microsoft Corporation. WingDings is a trademark of Microsoft Corporation and TrueType is a registered trademark of Apple Computer, Inc.

Albertus™, Arial™, Gill Sans™, Joanna™, and Times New Roman™ are trademarks of Monotype Corporation.

Antique Olive® is a registered trademark of M. Olive.


Eurostile™ is a trademark of Nebiolo.

Novell® and NetWare® are registered trademarks of Novell, Incorporated.

Sun® and Sun Microsystems® are registered trademarks of Sun Microsystems, Incorporated. SPARC® is a registered trademark of SPARC International, Incorporated. SPARCstation™ is a trademark of SPARC International, Incorporated, licensed exclusively to Sun Microsystems, Incorporated.

UNIX® is a registered trademark in the US and other countries, licensed exclusively through X/Open Company Limited.

As an ENERGY STAR® partner, Xerox Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency. The ENERGY STAR name and logo are registered U.S. marks.



This product uses code for SHA-1 written by John Halleck, which is being used with his permission.

This product includes an implementation of LZW licensed under U.S. Patent 4,558,302.

Other marks are trademarks or registered trademarks of the companies with which they are associated.

PANTONE® Colors generated by the Phaser 7300 Color Printer are four- and/or three-color process simulations and may not match PANTONE-identified solid color standards. Use current PANTONE Color Reference Manuals for accurate colors.

PANTONE Color simulations are only obtainable on this product when driven by qualified Pantone-licensed software packages. Contact Pantone, Inc. for a current list of qualified licensees.

Contents


Web Links	1
Xerox Supplies and Accessories	2
Customer-Replaceable Consumables (CRCs)	3
Customer-Replaceable Units (CRUs)	7
Paper and Media	8
Accessories	10
Printer Warranty	11
Consumables Warranty	11
User Safety Summary	14
Electrical Safety	14
Maintenance Safety	15
Operational Safety	15
Symbols Marked on Product	18
Printer Specifications	19
Physical Specifications	19
Environmental Specifications	19
Temperature	19
Relative Humidity	19
Electrical Specifications	19
Performance Specifications	20
Resolution	20
Print Speed	20
Controller Specifications	20
Memory	20
Page Description Languages (PDL)	20
Resident Fonts	20
Interfaces	20
Regulatory Information	21
Declaration of Conformity	22
In the European Union	22
Material Safety Data Sheets	23
Index	24

Web Links

Xerox provides you many resources to learn more about your Xerox Phaser® 7300 Color Printer. Use these web sites to obtain information on your printer.

To link to product and supplies information, download printer drivers, view documents, and access support information:	www.xerox.com/officeprinting
To access the troubleshooting knowledge base used by Xerox Customer Support staff:	www.xerox.com/officeprinting/infoSMART
To link to a color resource for tools and information, such as interactive tutorials, color printing templates, helpful tips, and customized features to meet your individual needs:	www.colorconnection.xerox.com
To view technical support information:	www.xerox.com/officeprinting/7300support
To order Xerox supplies:	www.xerox.com/officeprinting/7300supplies
To find your local sales and support center:	www.xerox.com/officeprinting/contacts

Xerox Supplies and Accessories

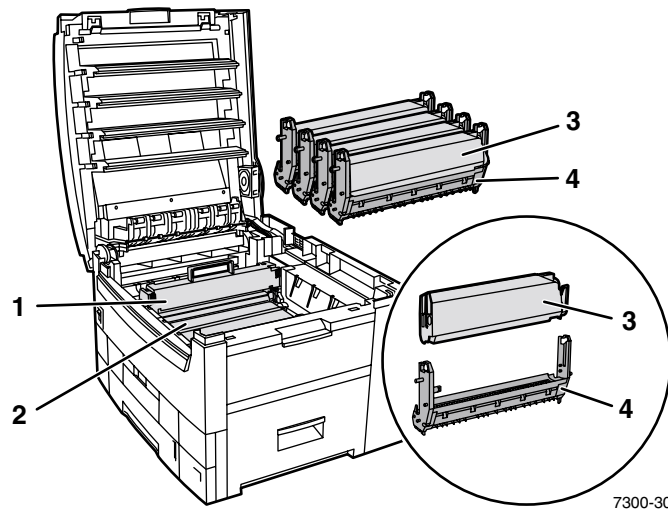

- 1 Fuser
- 2 Transfer Unit
- 3 Toner Cartridge(s)
- 4 Imaging Unit(s)


Note

Inside the printer, all handles and points of user interaction for replacing Customer-Replaceable Consumables (CRCs) are **light orange**.

When the front panel prompts you that a consumable is low or needs to be replaced, make sure that you have replacements on hand. To order supplies and accessories, contact your local reseller or visit the Xerox web site:

www.xerox.com/officeprinting/7300supplies

Customer-Replaceable Consumables (CRCs)

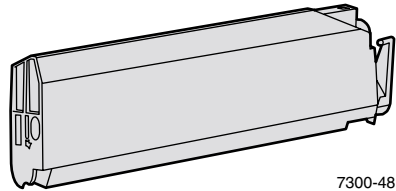

High-Capacity Toner Cartridges


Toner cartridge life expectancy is up to 15,000 images on letter-size paper at 5 percent coverage per color. The following customer usage patterns can significantly reduce toner cartridge life:

- higher than 5 percent coverage
- using paper that is larger than letter-size
- printing jobs of less than 5 pages
- opening and closing the top cover
- turning the printer off and on
- printing in a print-quality mode other than Standard


Note

Toner life expectancy will be slightly reduced when new imaging units are installed. Subsequent toner cartridges should achieve normal life expectancy.

Item	Part Number
Black	016-1980-00
Cyan	016-1977-00
Magenta	016-1978-00
Yellow	016-1979-00



This is an example of 5 percent coverage per color (20 percent total coverage).

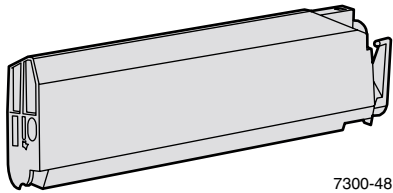

7300-48

Standard-Capacity Toner Cartridges


Toner cartridge life expectancy is up to 7,500 images on letter-size paper at 5 percent coverage per color. The following customer usage patterns may significantly reduce toner cartridge life:

- higher than 5 percent coverage
- using paper that is larger than letter-size
- printing jobs of less than 5 pages
- opening and closing the top cover
- turning the printer off and on
- printing in a print-quality mode other than Standard

Note


Toner life expectancy will be slightly reduced when new imaging units are installed. Subsequent toner cartridges should achieve normal life expectancy.

Item	Part Number
Black	016-1976-00
Cyan	016-1973-00
Magenta	016-1974-00
Yellow	016-1975-00



7300-52

This is an example of 5 percent coverage per color (20 percent total coverage).

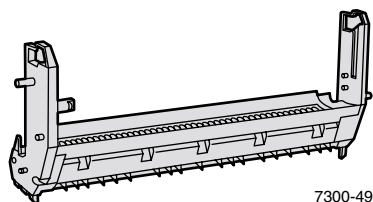

7300-49

Imaging Unit

Imaging unit life expectancy is up to 30,000 letter-size pages based on continuous printing. The following customer usage patterns may significantly reduce imaging unit life:

- printing jobs of less than 5 pages
- opening and closing the top cover
- turning the printer off and on
- printing on transparencies or specialty papers
- printing short-edge feed
- printing larger than letter-size print jobs
- automatic two-sided printing
- higher than 5 percent coverage

Note

Toner life expectancy will be slightly reduced when new imaging units are installed. Subsequent toner cartridges should achieve normal life expectancy.


Item	Part Number
Black Imaging Unit	016-1996-00
Cyan Imaging Unit	016-1993-00
Magenta Imaging Unit	016-1994-00
Yellow Imaging Unit	016-1995-00

Note

Cyan, Magenta and Yellow imaging units typically need to be replaced at the same time, regardless of color usage, so we offer the following kit.

Imaging Unit Kit

Item	Part Number
Imaging Unit Kit, Phaser® 7300 (each kit contains a Cyan, Magenta, and Yellow imaging unit)	016-1997-00

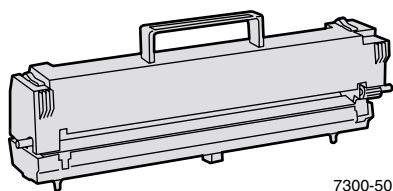


7300-50

Fuser

Fuser life expectancy is up to 80,000 letter-size pages. The following customer usage patterns may significantly reduce the transfer unit life:

- printing on transparencies or specialty papers
- printing on certain unsupported papers, especially inkjet papers and inkjet transparencies
- printing larger than letter-size print jobs

Item	Part Number
110 volt	016-1998-00
220 volt	016-1999-00

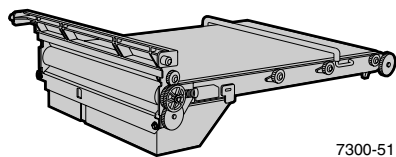

7300-51

Transfer Unit

Transfer unit life expectancy is up to 80,000 letter-size pages based on continuous printing. The following customer usage patterns may significantly reduce the transfer unit life:

- printing jobs of less than 5 pages
- opening and closing the top cover
- turning the printer off and on
- printing on transparencies or specialty papers
- printing short-edge feed
- printing larger than letter-size print jobs
- automatic two-sided printing
- higher than 5 percent coverage

Item	Part Number
Transfer Unit	016-2000-00

Customer-Replaceable Units (CRUs)

Tray (Paper Cassette Only)

Item	Description	Part Number
Tray 1	<ul style="list-style-type: none">■ 550 sheets of 75 g/m² (20 lb. bond) paper■ 250 Standard or 200 Premium transparency sheets <p>Note: If the automatic duplex unit is installed, it must be removed when replacing Tray 1.</p>	■ 116-1009-00
Trays 2-5	<ul style="list-style-type: none">■ 550 sheets of 75 g/m² (20 lb. bond) paper	■ 116-1042-00

Paper and Media

Phaser Professional Printing Paper

Item	Size	Description	Part Number
Phaser Premium Color Printing Paper 90 g/m ² (24 lb. bond)	A/Letter (U.S.) 8.5 x 11 in.	500 sheets	016-1368-00
	A4 (Metric Letter) 210 x 297 mm	500 sheets	016-1369-00
	B 11 x 17 in.	500 sheets	016-1699-00
	A3 297 x 420 mm	500 sheets	016-1700-00
	SRA3 320 x 450 mm	500 sheets	016-1901-00
	Tabloid Extra 12 x 18 in.	500 sheets	016-1900-00
Phaser Glossy Coated Paper 148 g/m ² (100 lb. book)	A/Letter (U. S.) 8.5 x 11 in.	100 sheets	016-1704-00
	A4 (Metric Letter) 210 x 297 mm	100 sheets	016-1705-00
	11 x 17 in.	50 sheets	016-1718-00
	A3	50 sheets	016-1719-00
	SRA3	50 sheets	016-1941-00
	12 x 18 in.	50 sheets	016-1940-00

Phaser 35-Series Transparency Film

Item	Size	Description	Part Number
Premium	A/Letter (U. S.) 8.5 x 11 in.	50 sheets	016-1896-00
Premium	A4 (Metric Letter) 210 x 297 mm	50 sheets	016-1897-00
Standard	A/Letter (U. S.) 8.5 x 11 in.	50 sheets	016-1894-00
Standard	A4 (Metric Letter) 210 x 297 mm	50 sheets	016-1895-00

Phaser Color Laser Labels

Size	Description	Part Number
A/Letter (U. S.) 8.5 x 11 in. (108 lb. label)	100 sheets / 30 labels per sheet (1.0 x 2.625 in. labels)	016-1812-00
A/Letter (U. S.) 8.5 x 11 in. (108 lb. label)	100 sheets / 6 labels per sheet (3.33 x 4.0 in. labels)	016-1813-00
A4 (Metric Letter) 210 x 297 mm (176 g/m ²)	100 sheets / 14 labels per sheet (38.1 x 99.1 mm labels)	016-1814-00
A4 (Metric Letter) 210 x 297 mm (176 g/m ²)	100 sheets / 8 labels per sheet (67.7 x 99.1 mm labels)	016-1815-00

Phaser Premium Cover Paper

Item	Description	Part Number
A/Letter (U.S.) 8.5 x 11 in. (60 lb., 163 g/m ²)	100 sheets	016-1823-00
A4 (Metric Letter) 210 x 297 mm (60 lb., 163 g/m ²)	100 sheets	016-1824-00

Phaser CD/DVD Labels and Inserts

Item	Description	Part Number
A/Letter (U.S.) 8.5 x 11 in.	10 sheets / 2 labels per sheet 20 sheets / 1 insert per sheet A/Letter (U.S.) 8.5 x 11 in. cards	016-2011-00
A4 (Metric Letter) 210 x 297 mm	10 sheets / 2 labels per sheet 20 sheets / 1 insert per sheet A4 (Metric Letter) 210 x 297 mm cards	016-2026-00

Phaser Premium Business Cards

Item	Description	Part Number
A/Letter (U.S.) 8.5 x 11 in. (70 lb.)	25 sheets / 10 cards per sheet 2.0 x 3.5 in. cards	016-1898-00
A4 (Metric Letter) 210 x 297 mm (190 g/m ²)	25 sheets / 10 cards per sheet 51 x 89 mm cards	016-1899-00

Phaser Premium Greeting Cards with Envelopes (Size A7)

Item	Description	Part Number
A/Letter (U.S.) 8.5 x 11 in. (70 lb.)	25 sheets / envelopes	016-1987-00
A4 (Metric Letter) 210 x 297 mm (190 g/m ²)	25 sheets / envelopes	016-1988-00

Cleaning Kit

Item	Description	Part Number
Cleaning Kit	Contains instructions and five alcohol wipes	016-1845-00

Accessories

Internal Hard Drive

Feature	Part Number
■ 10 Gbyte capacity	7300HD
■ Adds more storage for downloaded fonts, forms and overlays.	
■ Provides support for collation, Secure Print, Saved Print, and Proof Print jobs.	
■ Enables PDF printing.	

Automatic Duplex Unit

Features	Part Number
■ Enables automatic 2-sided printing.	7300DPX
■ Increased printing versatility and convenience.	
■ Enables booklet-style printing feature.	

Additional Memory

Feature	Part Number
■ 64 Mbytes	ZMD64
■ 128 Mbytes	ZMD128
■ 256 Mbytes	ZMD256
■ 512 Mbytes	ZMD512

550-Sheet Feeder

Feature	Part Number
■ Paper capacity is 550 sheets of 75 g/m ² (20 lb. bond) paper.	7300LTA
■ One or two lower tray assemblies can be installed.	

1650-Sheet High-Capacity Feeder

Feature	Part Number
■ 3 additional trays	7300LTD
■ Paper capacity is 1650 sheets of 75 g/m ² (20 lb. bond) paper in three trays.	
■ One lower tray assembly can be added above the lower tray deck for a total paper capacity of 2750 sheets in the trays plus 100 sheets in the Multi-Purpose Tray.	

Phaser 7300B to 7300N Upgrade Kit

Feature	Part Number
■ Adds networking capability and additional memory to 7300B Color Printer base model.	7300FN/A
■ Enables Enhanced print quality.	

Printer Warranty

Xerox warrants that the **Phaser 7300 Color Printer** will be free from defects in materials and workmanship for a period of one (1) year from the date of shipment or 1,000,000 prints, whichever comes first. If the product proves defective during the warranty period, Xerox, at its option, will:

- repair the product by means of telephone support or on-site service at no charge for parts or labor,
- replace the product with a comparable product,
- replace the product with a remanufactured unit, or
- refund the amount paid for the product, less a reasonable allowance for usage, upon its return.

Xerox recommends the Customer first utilize support materials shipped with the product, product diagnostics information contained on the Web, and email support. If unsuccessful, to obtain service under this warranty the Customer must notify Xerox Telephone Support or its authorized service representative of the defect before the expiration of the warranty period. Customers will provide appropriate assistance to Telephone Support personnel to resolve issues.

If telephone support is unsuccessful, Xerox or its authorized service representative will provide warranty repair at Customer's site without charge as provided below.

- Service is available within the customary on-site service area in the United States, Canada, and the European Economic Area for products purchased in the United States, Canada, and the EEA.
- Outside the US, Canada, & EEA, service is available within the customary on-site service area in the country of purchase

Xerox reserves the right to charge for on-site service in exceptional cases.

A description of the customary on-site service area may be obtained from the local Xerox Customer Support Center or authorized Xerox distributor. On-site service is at Xerox or its authorized service representative's sole discretion and is considered an option of last resort.

If the Customer's product contains features that enable Xerox or its authorized service representative to diagnose and repair problems with the product remotely, Xerox may request that the Customer allow such remote access to the product.

In the maintenance of the product, Xerox may use new or equivalent to new parts or assemblies for equal or improved quality. All defective parts and assemblies become the property of Xerox. Xerox, at its option, may request the return of these parts.

Consumables Warranty

Xerox warrants that toner cartridges will be free from defects in materials and workmanship until the original Xerox toner has been depleted. All other Customer Replaceable Consumables (CRCs) will be covered for a period of ninety (90) days (six (6) months where longer periods are required by law) from the date of installation, but not more than one (1) year from date of shipment. Under this warranty, the Customer must notify Xerox or its authorized service representative of the defect before the expiration of the warranty period. XEROX MAY REQUIRE THAT THE DEFECTIVE CRC BE RETURNED TO A DESIGNATED XEROX DEPOT OR THE XEROX REPRESENTATIVE FROM WHICH THE CRC WAS ORIGINALLY PURCHASED. Claims will be handled according to the current Xerox procedure.

These warranties shall not apply to any defect, failure or damage caused by improper use or improper or inadequate maintenance and care. Xerox shall not be obligated under these warranties:

- to repair damage resulting from attempts by personnel other than Xerox representatives to install, repair or service the product unless directed by a Xerox representative;
- to repair damage, malfunction, or degradation of performance resulting from improper use or connection to incompatible equipment or memory;
- to repair damage, malfunction, or degradation of performance caused by the use of non-Tektronix/Xerox printer supplies or consumables or the use of Tektronix/Xerox supplies not specified for use with this printer;
- to repair a product or CRC that has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty of servicing the product or CRC;
- to perform user maintenance or cleaning or to repair damage, malfunction, or degradation of performance resulting from failure to perform user maintenance and cleaning as prescribed in published product materials;
- to repair damage, malfunction, or degradation of performance resulting from use of the product in an environment not meeting the operating specifications set forth in the user manual;
- to repair this product after the limit of its duty cycle has been reached; all service thereafter shall be billed on a time and material basis;
- to replace CRCs that have been refilled, are used up, abused, misused, or tampered with in any way;
- to support software not supplied by Xerox;
- to provide software or firmware updates or upgrades.

THE ABOVE WARRANTIES ARE GIVEN BY XEROX WITH RESPECT TO THIS PRODUCT AND ITS CUSTOMER REPLACEABLE CONSUMABLES IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. XEROX AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY SIMILAR STANDARD IMPOSED BY APPLICABLE LEGISLATION. XEROX' RESPONSIBILITY TO REPAIR, REPLACE, OR OFFER A REFUND FOR DEFECTIVE PRODUCTS AND CUSTOMER REPLACEABLE CONSUMABLES IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THESE WARRANTIES.

Some states, provinces, and countries do not allow the exclusion or limitation of incidental or consequential damages or exclusions or limitations on the duration of implied warranties or conditions, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary by state, province, or country.

TO THE EXTENT ALLOWED BY LOCAL LAW, EXCEPT FOR THE OBLIGATIONS SPECIFICALLY SET FORTH IN THIS WARRANTY STATEMENT, IN NO EVENT SHALL XEROX AND ITS VENDORS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOSS OF PROFITS) WHETHER BASED ON CONTRACT, TORT, OR ANY OTHER LEGAL THEORY AND IRRESPECTIVE OF WHETHER XEROX OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

For the software warranty, see the end user license agreement included with the software.

In certain geographies this product is warranted by Fuji Xerox. This statement of warranty does not apply in Japan – please refer to the warranty statement provided in the Japanese user manual for products purchased in Japan.

If you are an Australian consumer, you should be aware that the *Trade Practices Act 1974* and equivalent State and Territory legislation (collectively “**the Acts**”) contain special provisions designed to protect Australian consumers. Nothing in any Fuji Xerox warranty material excludes or limits the application of any provision of any of the Acts, where to do so would contravene the Acts or cause any part of this warranty to be void. In this warranty material, an implied condition or warranty, the exclusion of which from a contract with a “Consumer” (as defined in the Acts) would contravene any provision of the Acts or cause any part or all of this warranty to be void, is called a “Non-excludable Condition”. To the full extent permitted by law, Fuji Xerox’ sole and total liability to the customer for a breach of any Non-excludable Condition (including for any consequential loss suffered by the customer) is limited, except as otherwise stated herein, to (at Fuji Xerox’ option) replacing or repairing the goods, or resupplying, or paying the cost of the resupply of, the services, in respect of which the breach occurred. Subject to the above, all conditions and warranties which would or might otherwise be implied in a Consumer contract, whether by operation of statute, inference from circumstances, industry practice or otherwise, are excluded.

User Safety Summary

Your printer and the recommended consumable supplies have been designed and tested to meet strict safety requirements. Attention to the following notes will ensure the continued safe operation of your printer.

Electrical Safety

- Use the power cord supplied with your printer.
- Do not use a ground adapter plug to connect the printer to a power source receptacle that lacks a ground connection terminal.
- Plug the power cord directly into a properly grounded electrical outlet. Do not use an extension cord. If you do not know whether an outlet is grounded, ask an electrician to check the outlet.

Warning

Avoid the potential of electrical shock by ensuring that the printer is properly grounded.

- Do not place the printer where people may step on the power cord.
- Do not place objects on the power cord.
- Do not obstruct the ventilation openings. These openings are provided to prevent overheating of the printer.

Warning

Do not push objects into slots or openings on the printer. Making contact with a voltage point or shorting out a part could result in fire or electrical shock.

- If you notice unusual noises or odors, switch off the printer power immediately. Disconnect the power cord from the electrical outlet. Call an authorized service representative to correct the problem.
- The power cord is attached to the printer as a plug-in device at the back of the printer. In the event it is necessary to remove all electrical power from the printer, disconnect the power cord from the power receptacle.

Warning

Electrical products may be hazardous if misused.

Warning

For your protection, do not disable any internal safety locks or sensors.

Note

Leaving the printer on is recommended for optimum performance, and does not pose a safety hazard.

- If any of the following conditions occur, switch off the printer power immediately, disconnect the power cord, and call an authorized service representative.
 - The power cord is damaged or frayed.
 - Liquid is spilled into the printer.
 - The printer is exposed to water.

Maintenance Safety

- Do not attempt any maintenance procedure that is not specifically described in the documentation supplied with your printer.
- Do not use aerosol cleaners. The use of supplies that are not approved may cause poor performance and could create a dangerous condition.
- Do not remove the covers or guards that are fastened with screws unless you are installing optional equipment and are specifically instructed to do so. Power should be OFF when performing these installations. Except for user-installable options, there are no parts that you can maintain or service behind these covers.

Operational Safety

Your printer and supplies were designed and tested to meet strict safety requirements. These include safety agency examination, approval, and compliance with established environmental standards.


Your attention to the following safety guidelines will help to ensure the continued safe operation of your printer.

- Use the material and supplies specifically designed for your printer. The use of unsuitable materials may result in poor performance and possibly a hazardous situation.
- Follow all warnings and instructions marked on, or supplied with, the printer, options and supplies.
- Place the printer in a dust free area where the temperature range is 50 degrees F to 90 degrees F (10 degrees C to 32 degrees C) and the relative humidity range is 10 percent to 85 percent.
- Place the printer in an area where there is adequate space for ventilation, operation and servicing. The recommended minimal spacing is 20 cm (8 in.) behind and on each side of the printer. Do not block or cover the slots and openings on the printer. Without adequate ventilation, the printer may overheat.
- For optimum performance, use the printer at elevations below 2,500 m (8,200 ft.). Performance may diminish at elevations between 2,500 m (8,200 ft.) and 3,000 m (9,840 ft.). Use at elevations above 3,000 m (9,840 ft.) exceeds operability limits.
- Do not place the printer near a heat source.
- Do not place the printer in direct sunlight.
- Do not place the printer in line with the cold air flow from an air conditioning system.
- Place the printer on a level, solid surface with adequate strength for the weight of the machine. The base printer weight without any packaging materials is 68 kg (149 pounds).

- The printer is heavy, and must be lifted by three people. The illustration below shows the proper technique for lifting the printer.

Note

Do not use the Multi-Purpose Tray or Left Side Output Tray to lift the printer.



- Follow the recommended procedure when moving the printer from one location to another. You can find this procedure in the *Moving Guide* printable page located in the *Setup Guide* on the **Interactive Documentation CD-ROM**.
- Do not place any liquids on the printer.


Warning

Be careful when working in areas inside the printer identified with a warning symbol. These areas may be very hot and could cause personal injury.


- Wait 10-15 seconds between switching the printer off and on.
- Keep hands, hair, neckties, etc., away from the exit and feed rollers.

While printing, follow these safety guidelines:

- Do not remove the paper source tray that you have selected in the driver or front panel or any tray above it.
- Do not open the covers while printing.

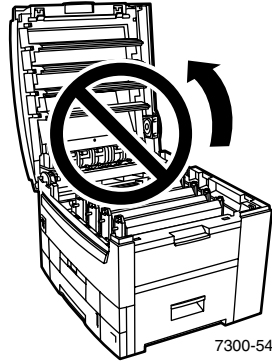

- Do not switch off the printer power while printing.



- Do not move the printer while printing.

Symbols Marked on Product

DANGER high voltage:



Protective ground (earth) terminal:



Hot surface on or in the printer. Use caution to avoid personal injury:



Avoid pinching fingers in the printer. Use caution to avoid personal injury:



Use caution (or draws attention to a particular component). Refer to the manual(s) for information:



Printer Specifications

Physical Specifications

Width: 666 mm (26.22 in.)

Depth: 626 mm (24.65 in.)

Height: 460 mm (18.11 in.)

Weight: 68 kg (149 lbs.)

Environmental Specifications

Temperature

- Storage: -20 degrees to 60 degrees C / -4 degrees to 140 degrees F
- Operating: 10 degrees to 32 degrees C / 50 degrees to 90 degrees F
- Optimum print quality environmental conditions: 17 degrees to 26 degrees C / 62 degrees to 80 degrees F

Relative Humidity

- Storage: 10% to 95%
- Operating: 10% to 85%
- Optimum print quality environmental conditions: 35% to 70%

Electrical Specifications

Available in two models:

- 110-127 VAC, 50/60 Hz
- 220-240 VAC, 50/60 Hz

ENERGY STAR® qualified printer

Performance Specifications

Resolution

- 600 x 600 dpi
- 600 x 2400 dpi

Print Speed

- Up to 37 ppm (pages per minute) black
- Up to 30 ppm color

Controller Specifications

500 MHz processor

Memory

- 128 Mbytes PC133 DRAM Standard on the Phaser® 7300B Color Printer
- 192 Mbytes PC133 DRAM Standard on the Phaser® 7300N Color Printer
- 256 Mbytes PC133 DRAM Standard on the Phaser® 7300DT Color Printer
- 384 Mbytes PC133 DRAM Standard on the Phaser® 7300DX Color Printer
- Upgradable to a maximum of 512 Mbytes

Page Description Languages (PDL)

- PCL5c
- Adobe PostScript 3
- PDF

Resident Fonts

- 136 PostScript Type 1
- 115 Central European PostScript Type 1
- 46 PCL fonts

Interfaces

- IEEE 1284 parallel
- Ethernet 10BaseT and 100BaseTx
- USB

Regulatory Information

The equipment described in this manual generates and uses radio frequency energy. If it is not installed properly in strict accordance with Xerox's instructions, it may cause interference with radio and television reception or may not function properly due to interference from another device. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiver (device being interfered with).
- Increase the separation between the printer and the receiver.
- Connect the printer into an outlet on a circuit different from that which the receiver is connected.
- Route the interface cables on the printer away from the receiver
- Consult the dealer, Xerox service, or an experienced radio/television technician for help.

Changes or modifications not expressly approved by Xerox can affect the emission and immunity compliance and could void the user's authority to operate this product. To ensure compliance, use shielded interface cables. A shielded parallel cable can be purchased directly from Xerox at www.xerox.com/officeprinting/7300supplies.

Xerox has tested this product to internationally accepted electromagnetic emission and immunity standards. These standards are designed to mitigate interference caused or received by this product in a normal office environment. This product is also suitable for use in a residential environment based on the levels tested.

In the United States this product complies with the requirements of an unintentional radiator in part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference; (2) this device must accept any interference received, including interference that may cause undesired operation.

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications, ICES-003.

Le présent appareil numérique n'émet pas de bruits radioélectrique dépassant les limites applicables aux appareils numériques de la classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada, ICES-003.

Declaration of Conformity

Xerox Corporation, declares, under our sole responsibility that the printer to which this declaration relates, is in conformity with the following standards and other normative documents:

In the European Union

following the provisions of the Low Voltage Directive 73/23/EEC and its amendments:

EN 60950 (IEC 950)	"Safety of Information Technology Equipment including Electrical Business Equipment"
--------------------	--

following the provisions of the Electromagnetic Compatibility Directive 89/336/EEC and its amendments:

EN55022:1998 (CISPR 22)	"Limits and Methods of measurement of radio interference characteristics of Information Technology Equipment." Class B.
EN61000-3-2:1995 +A1:1998+A2:1998. (IEC61000-3-2)	"Part 3: Limits - Section 2: Limits for harmonic current emissions (equipment input current less than or equal to 16 A per phase)."
EN61000-3-3:1995 (IEC61000-3-3)	"Part 3: Limits - Section 3: Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current less than or equal to 16 A."
EN55024:1998 (CISPR 24)	"Information technology equipment - Immunity characteristics - Limits and methods of measurement. "

CISPR 24 Immunity Phenomena	Basic Standard	Test Specification
Electrostatic Discharge	IEC61000-4-2:1995	6 kV Contact, 10 kV Air
Radio-Frequency Electromagnetic Field (radiated)	IEC61000-4-3:1995	80-1000 MHz, 3 V/m, 80% AM @ 1 kHz
Fast Burst Transients	IEC61000-4-4:1995	5/50 Tr/Th ns, 5 kHz Rep. Freq 0.5 kV on Signal Lines 1 kV on AC Mains
Line Surge	IEC61000-4-5:1995	Combination wave 2.0 kV Common mode 2.0 kV Differential mode
Radio-Frequency Electromagnetic Field (Conducted)	IEC61000-4-6:1996	0.15 - 80 MHz, 3 V, 80% AM @ 1 kHz
Line voltage dips	IEC61000-4-11:1994	>95% dip for ½ cycle @ 50 Hz 30% dip for 25 cycles @ 50 Hz
Line voltage drop-out	IEC61000-4-11:1994	>95% dropout for 250 cycles @ 50 Hz

This product, if used properly in accordance with the user's instructions is neither dangerous for the consumer nor for the environment.

A signed copy of the Declaration of Conformity for this product can be obtained from Xerox.

Material Safety Data Sheets

The Material Safety Data Sheets are available in English on the following Xerox web site:
www.xerox.com/officeprinting/products/msds.html

Index

A

accessories 10

B

business cards
part number 9

C

CD labels and inserts
part number 9
cleaning kit
part number 9
controller specifications 20
cover paper
part number 9
Customer-Replaceable Consumables
CRCs 3
Customer-Replaceable Units
CRUs 7

D

declaration of conformity 22
duplex unit
part number 10
DVD labels and inserts
part number 9

F

fuser
location 2
part number 6

G

greeting cards
part number 9

H

hard drive part number 10
high-capacity toner cartridge
part number 3

I

imaging unit
location 2
part number 5
imaging unit kit
part number 5
internal hard drive
part number 10

L

labels
part number 8

M

Material Safety Data Sheet 23
memory, additional
part number 10

P

paper and media
part numbers 8
paper tray
part number 7
part number
additional memory 10
automatic 2-sided printing unit 10
business cards 9
CD/DVD labels and inserts 9
cleaning kit 9
cover paper 9
fuser 6
greeting cards 9
high-capacity toner cartridge 3
imaging unit kit 5
imaging units 5
internal hard drive 10
labels 8
paper 8
paper tray 7
standard-capacity toner cartridge 4
transfer unit 6
transparency 8
printer specifications 19
printer speed 20

R

regulatory information 21
resolution 20

S

safety
 electrical safety 14
 maintenance safety 15
 operational safety 15
 symbols 18
standard-capacity toner cartridges
 part number 4
supplies and accessories
 ordering 2

T

toner cartridge
 high-capacity 3
 location 2
 standard-capacity 4
transfer unit
 location 2
 part number 6
transparency
 part number 8

U

user safety summary 14

W

warranty
 consumables 11
 printer 11
web links 1
web site
 contacting Xerox 1
 supplies 1
 support 1