XEROX®

Technology Document Management Consulting Services

Xerox DocuTech® 6100/6115/6135 Production Publishers and **PowerPlus Series**


Specifications









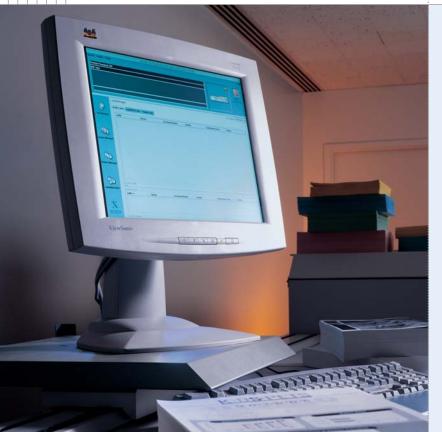

The DocuTech 6100/6115/6135

deliver high-value digital services like print on demand, distribute then print, and 1:1 marketing. Now, you can start on the road to digital printing success at a pace that's just right—up to 135 pages per minute.

DocuTech 6100/6115/6135 are ideal entry points to enter the digital world, or an economical way to complement your current DocuTech system capacity. In either case, your business will move faster and more productively when it is... **powered by DocuTech.**

Xerox DocuTech 6100/6115/6135



The PowerPlus Series extends DocuTech's industry-leading capabilities with enhancements that expand the media latitude and complex job capabilities of the system such as a 3 Tray Interposer and support for large format and coated stocks.

For more information on the Xerox DocuTech® 6100/6115/6135 Production Publishers and the PowerPlus Series, call **1-800 ASK XEROX** or visit us on the Web at: www.xerox.com

Xerox DocuTech 6100/6115/6135 Production Publisher and the PowerPlus Series Specifications

Printer Control Module

- Sun Blade[™] 2500
- 1.28 GHz UltraSparc III processor
- 36 GB system disk
- 2 GB memory
- DVD-ROM Drive
- 17.0" color flat panel display
- Keyboard and mouse
- Ethernet interface (10/100BaseT)
- Controller stand (optional)

Printer Module

- Xerographic Engine
- Print speeds:
 - DocuTech 6100: Up to 96 ppm (8.5" x 11"/A4)
 - DocuTech 6115: Up to 115 ppm (8.5" x 11"/A4)
- DocuTech 6135: Up to 135 ppm (8.5" x 11"/A4) On-site upgrades are available for the DocuTech
- 6100 and 6115*
- Simplex or duplex printing
- Enhanced 600 x 600 dpi laser raster output
- ImageSense Technology with redesigned 85+ and 106+ line screens and new 121 and 140 line screens
- On-line, right and left side stitching/binding
 - Optional Interposers:
 - 2 Tray Interposer or
 - 3 Tray Interposer

Throughput Materials

(Printing and finishing)

- Stock weights: 16 lb. bond to 110 lb. index (60 g/m² to 200 g/m²)
- Sizes: 8" x 10" to 14.33" x 17"
 (203 mm x 254 mm to 363 mm x 432 mm)
- Narrow format option available for 7" width
- Extra large format option available for up to 14.33" x 19.2"*
- Lightweight paper option available for 13 lb. bond*

PowerPlus Series Options**

- 3 Tray Interposer
- PowerPlus Large format option available for up to 14.33" x 18.5" (364 mm x 470 mm)
 - Tray 3 14.0" x 18.0" (356mm x 457mm)
 - Tray 4,5,(6) up to 14.33" x 18.5"
 - (364 mm x 470 mm)

For information on great applications from Xerox Supplies, call 1-800-822-2200 in the USA or 1-800-668-0199 in Canada



Paper Input Capacity

(Sheet capacity all at 20 lb./75 g/m²)

- Tray 1 1,100 sheets; 8" x 10" to 9" x 14.33" (203 mm x 254 mm to 229 mm x 364 mm)
- Tray 2 600 sheets; 8" x 10" to 9" x 14.33" (203 mm x 254 mm to 229 mm x 364 mm)
- Tray 3 2,600 sheets of up to 14.33" x 17" (364 mm x 432 mm)

Paper Input Option – Interposers

- 2 Tray Interposer (for a total of 5 input paper trays with auto tray switching and document inserts):
 Tray 4*** 550 sheets of up to 14.33" x 17"
 - (364 mm x 432 mm) - Tray 5 2,600 sheets of up to 14.33" x 17" (364 mm x 432 mm)
- 3 Tray Interposer (for a total of 6 input paper trays with auto tray switching and document inserts):
 - Tray 4*** 550 sheets of up to 14.33" x 17" (364 mm x 432 mm)
 - Tray 5 550 sheets of up to 14.33" x 17" (364 mm x 432 mm)
 - Tray 6 550 sheets of up to 14.33" x 17" (364 mm x 432 mm)

Paper Output Options

- Stacker: 3,000 sheets at 20 lb. (75 g/m²) Optional: 5,000 sheets at 20 lb. (75 g/m²) (with one High Capacity Stacker) Optional: 10,000 sheets at 20 lb. (75 g/m²) (with two High Capacity Stackers)
- Stitcher: 2 70 sheets at 20 lb. (75 g/m²) 1 or 2 adjustable stitches
- Binder: 15 125 sheets at 20 lb. (75 g/m²) - Tape colors: Black, blue, red, brown, gray, white or green
- 425 11" binds per tape reel
- SquareFold Booklet Maker (optional) - Fully automatic booklet making system
 - All operator settings are made with the push of a few buttons
 - Up to 22 sheets at 20 lb., 26 sheets at 16 lb
 - Paper sizes:
 Width
 Length

 Min.
 8" (203 mm)
 10" (254 mm)

 Max.
 12.3" (312 mm)
 18.2" (462 mm)

 - Cover Insertion Module (CIM) (optional)
 100 (200 mm)
 - Cover Insertion Module (CIM) (optional)
- Adjustable saddle stitch heads, folder, trimmer
- Supports Level 1 Document Finishing Architecture (DFA)

Client Environments Supported

- Windows 95/98, NT, 2000, XP
- Mac OS 7.6 and above
- Sun OS 4.1.3 / Solaris 1.1.1B
- Solaris 2.3 / 2.4 / 2.5.1 / 2.6 / 8.x

PDLs and Data Formats

- Adobe PostScript Level 3/PDF
- PCL 6 TIFF ASCII Optional LCDS

HTTP

SNMP

• FreeFlow[™] Variable Information Suite

Native Network Environments

- TCP/IP AppleTalk
- Novell (SPX-IPX) IPP
- Optional Channel Connectivity

Electrical Requirements

- Printer Controller:
 - 100/240 VAC + 10%, 47-63 Hz
- Printer Module:
 - 120/208 or 120/240 VAC, 60 Hz, 50 amp service, NEMA 14-30 R (domestic)
 - 200/240 VAC ± 10%, 50 Hz or 3 phase WYE connection, 380 VAC ± 10%, 50 Hz
 - 380 VAC ± 10%, 50 Hz
 - KVA rating: Standby: 2.73; Operating: 6.45 (without Interposer). Standby: 2.80; Operating: 7.65 (with Interposer)
 - Agency certification: UL 1950 IEC 950, CSA 22.2 - 950, FCC (Class A), EN55022 (Class A), CISPR22 (Class A), EN50082-1: 1992 (Generic Immunity Standard), and ICES003 (Class A)
- Interposer (optional):
 100/240 VAC + 10%, 47-63 Hz, 10A

Physical Characteristics

<i>Width</i> Printer Contr	<i>Depth</i> oller - Proces	<i>Height</i> sor Module	Weight
· · · ·	24" (610 mm) oller - Contro	17.9" (455 mm) Iler Stand	70 lbs. (32 kg)
()	, ,	38" (965 mm) Tat Panel Disp	(0)
()	,	19.25" (489 mm) ptional Interpo	(8)
Interposer (o	optional)	48.3" (1226 mm) 49.0" (1240 mm)	2502 lbs. (1136 kg) 710 lbs. (322 kg)

Please reference the specification sheets for Xerox FreeFlow[™] Makeready, FreeFlow[™] Process Manager, and FreeFlow[™] Web Services for complete details.



*Contact your Xerox Sales Representative for more details. **PowerPlus features available for new printer installations only. Each option sold separately. ***Tray 4 only accepts sheets which do not need to be imaged, i.e., covers and inserts.

2005 XEROX Corporation. All rights reserved. XEROX, FreeFlowTM, and DocuTech* are trademarks of or licensed to Xerox Corporation. Sun and Sun Blade are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. Product appearance, build status and/or specifications are subject to change without notice. The Xerox Total Satisfaction Guarantee applies to equipment under a Xerox warranty or a Full Service Maintenance Agreement and is subject to certain conditions. 04/05. 610P714020C