

Xerox Nuvera[®] 200/288 EA and MX Perfecting Production Systems

Print Controller

RIP

- Xerox[®] FreeFlow[®] Print Server
- Parallel RIP (available for PDF, PS, VIPP[®] data streams)
- 3.0 GHz Dual Core Processor (optional second dual core processor with additional 4 GB memory)
- Server Class Processors:
 - Opteron[™] Technology
 - Sun Solaris 10 OS
- 19" color flat panel monitor (attached), USB keyboard, USB mouse
- Data Stream Options:
 - TIFF/PCL 5e & PCL6/ASCII-standard Adobe PDF; Adobe PostScript Level 3; Multi-page TIFF; PPML; LCDS/Metacode; IPDS
- Connectivity:
 - Ethernet interface (10/100BaseT; 1 GB)
 - S/370 or S/380 Bus and Tag (optional)

Storage

- Memory: 4 GB
- Hard Drive: 160 GB SATA
- DVD+RW Drive (CD write only)
- Second Hard Drive: 1 TB SATA (optional)

Print Submission Drivers

- Microsoft Windows[®] 95 through Windows[®] XP Professional. Windows[®] Vista will be available post launch
- Apple Macintosh[®] OS 8 through Macintosh[®] OS X
- Sun Microsystems[®] Solaris[®] 2.6, 7.x, 8.x, 9.0, 10
- Linux[®] 2.x
- FreeFlow[®] Print Manager for direct PDL submission
- Xerox Web User Interface

Management Tool Support

- IBM[®] Tivoli[®]
- CA[™] Unicenter[®]
- HP OpenView
- SNMP V.1, IETF and Xerox MIB's, Trap Support
- CentreWare[®] Web

Printer Module

Image Quality

- 1200 x 1200 dpi RIP resolution
- 4800 x 600 dpi print resolution
- Halftone screen: 85, 106, 125, 134, 156 lpi
- Operator adjustable settings: light/dark, contrast, Toner Saver
- Semi Conducting Magnetic Brush Technology (SCMB) with Emulsion Aggregation (EA) toner
- Silicon/Teflon[®] fusing for sharper halftones
- Dual beam Raster Output Scanner (ROS)
- Print path image-to-sheet and front-to-back registration ± .65 mm

Toner

- EA Toner: 210,000 prints/9 lb. Bottle (1 Bottle per system, 2nd optional)
- MICR Toner: 90,000 prints/11.1 lb. Bottle (2 Bottles per system)

Print Speed

- Duplex 8.5" x 11"/A4 speeds of 200 or 288 impressions per minute
- Duplex 11" x 17"/A3 speeds of 120 or 144 impressions per minute

Sheet Enhancement Module


- Post process module provides:
 - Outstanding stack quality
 - Sheet flatness for enhanced reliability of finishing options (booklet makers, perfect binders, stackers, etc.)
 - Automatically adjusts per individual media type

Media Feeding & Insertion Options

Sheet-feed & Insertion Modules*

- 4-tray
- Total 5,800 sheets per module
- Vacuum Air Shuttle feed system
- Optional: up to three modules available in any combination
- Tray 1: 1,600 sheets; 5.5" x 8" to 9" x 12.6" (140 mm x 203 mm to 229 mm x 320 mm)
- Tray 2: 3,100 sheets; 5.5" x 8" to 9" x 12.6" (140 mm x 203 mm to 229 mm x 320 mm)
- Tray 3 & 4: 550 sheets each; 7.2" x 8" to 12.6" x 18.5" (182 mm x 203 mm to 320 mm x 470 mm)

* Capacity based on 20 lb bond/75 gsm

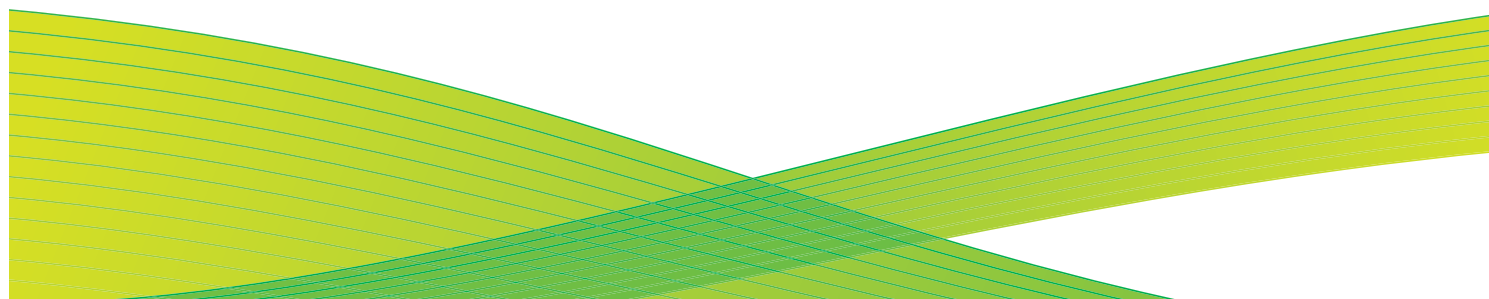

Xerox Nuvera® 200/288 EA and MX Perfecting Production Systems

Oversized High Capacity Sheet-feed & Insertion Modules*

- 2-tray
- Total 3,200 sheets per module
- Vacuum Air Shuttle feed system
- Optional second module available
- Tray 1: 1,600 sheets; 7.2" x 8" to 12.6" x 19.3" (182 mm x 203 mm to 320 mm x 491 mm)
- Tray 2: 1,600 sheets; 7.2" x 8" to 12.6" x 19.3" (182 mm x 203 mm to 320 mm x 491 mm)

EA Media Latitude

- Coated: 60 lb text to 90 lb cover (90 – 250 gsm)
- Uncoated: 16 lb Bond to 90 lb cover (56 – 250 gsm)

MICR Media Latitude

- Coated: 140 gsm or less
- Uncoated: 56-250 gsm

Basic Finisher Module (BFM), Basic Finisher Module Plus, and Basic Finisher Module-Direct Connect (BFM-DC)*

- Top tray: 250 sheet capacity (BFM only)
- Stacker: 3,000 sheet capacity; offset between sets or jobs
- One or two staples, up to 100 sheets
- Size: 5.5" x 8.5" (A5 and SRA3, papers > 12" in cross process direction to top tray only)
- Size: 7" x 10" to 12" x 18" (B5 to A3)
- BFM-DC is Document Finishing Architecture (DFA) compliant and provides direct connection to center-registered finishing devices such as the Xerox Tape Binder, C.P.Bourg (Watkiss) PowerSquare™ 200, and CEM DocuConverter™
- BFM-DC top tray: 5.7" – 19.3" (144 mm x 491 mm)

Xerox® DS3500 Stacker

- Replaces Finishing Transport Module
- Capacity of 3,500 sheets
- Document transport capability and full DFA to support Center or Edge registered output.
- Sheet level jam recovery
- Unload while run/unload on demand functionality
- Interface to all in-line production finishing devices

*Capacity based on 20 lb bond/75 gsm

Xerox Tape Binder

- Sheets/Book size: 15 to 125 sheets (20 lb bond/75 gsm)
- Tray capacity up to 1,500 sheets
- Binder Tape Strips: 100/cartridge (Black, Dark Blue and White)
- Compatible with BFM-DC or Xerox DS3500 Stacker for in-line access to other finishing devices

Xerox Tape Binder Media Latitude

- 8.5" x 11"/A4
 - Body/Insert Stock: 60-220 gsm uncoated
 - Covers: 60-250 gsm uncoated, 90-220 gsm coated
 - Transparencies
- Tabs up to 0.5" (12.5mm) wide

Electrical Requirements

- Dual 187-240 VAC (nominal), 50 Amp, 50/60 Hz line service for North America
 - DS3500 and DFA Finishers will require additional line service and power
- Dual 187-240 VAC (Nominal), 30 Amp (one for each Print Engine and Sheet Enhancement Module) for Europe
 - Feeders and Finisher Modules will require additional power
 - DS3500 and DFA Finishers will require additional line power
- Optional modules require standard 100-240 VAC, 50/60 Hz line service
- Power consumption: 1.316 kw (standby); 8.300 kw (running)
- Consult *Installation Planning Guide* for detailed power requirements

Environmental Requirements

- Temperature: 50° to 87° F (10° to 31° C)
- Relative humidity: 15% to 85%; wet bulb limitation 77° F
- Run mode heat emissions: configuration dependent; consult *Installation Planning Guide*

Certifications

- Corporate Environmental Leadership Team policy of maintaining a waste-free customer office
- UL 60950-1, C-UL Approved for Canada CAN/CSA- C222.2 No. 60950-1-3 and IEC 60951-1

Physical Characteristics

Sheet Feed and Insertion Module			
Width	Depth	Height	Weight
31.7"	28"	44.6"	423 lbs.
805 mm	711.2 mm	1,133 mm	192 kg
Print Engine(s)			
Width	Depth	Height	Weight
88"	29"	61.6"	1,600 lbs.**
2,229 mm	737 mm	1,565 mm	726 kg**
Sheet Enhancement Module			
Width	Depth	Height	Weight
15"	28"	41.5"	168 lbs.
381 mm	711.2 mm	1,054 mm	76.2 kg
Basic Finisher Module			
Width	Depth	Height	Weight
33"	28"	44.6"	369 lbs.
838 mm	711.2 mm	1,133 mm	167.4 kg
Basic Finisher Module Plus & Basic Finisher Module-Direct Connect			
Width	Depth	Height	Weight
49"	28"	44.6"	560 lbs.
1,233 mm	711.2 mm	1,133 mm	254 kg
Xerox DS3500 Stacker			
Width	Depth	Height	Weight
35"	28"	44.75"	480.6 lbs.
889 mm	711.2 mm	1,136.65 mm	218 kg
Xerox Tape Binder			
Width	Depth	Height	Weight
34.1"	28"	42.4"	352 lbs.
870 mm	708 mm	1080 mm	160 kg

**With consumables loaded.

Please reference the specification sheets for Xerox FreeFlow® Makeready, FreeFlow® Process Manager and FreeFlow® Web Services for complete details.

For more information on the Xerox Nuvera 200/288 EA and MX Production Systems, please contact your Xerox representative, call (1-800-ASK-XEROX), or visit us online at www.xerox.com.

©2009 Xerox Corporation. All rights reserved. Xerox® and the sphere of connectivity design and CentreWare®, FreeFlow®, Xerox Nuvera® and VIPP® are trademarks of Xerox Corporation in the United States and/or other countries. Product appearance, configuration availability, build status and/or specifications are subject to change without notice. In support of Xerox's environmental leadership goals, this model may contain some recycled components that are reconditioned. The Xerox Total Satisfaction Guarantee applies to equipment under a Xerox warranty or a Full Service Maintenance Agreement and is subject to certain conditions. Opteron® is a registered trademark of AMD, Inc. Windows® is a trademark of Microsoft Corporation. IBM® and Tivoli® are registered trademarks of IBM, Inc. CA and Unicenter® are registered trademarks of Computer Associates, Inc. Adobe® and PostScript® are registered trademarks of Adobe Systems, Inc. Sun® and Sun Microsystems® are registered trademarks of Sun Microsystems, Inc. in the U.S. and/or other countries. PowerSquare™ is a trademark of C.P. Bourg Inc. in the U.S. and/or other countries. CEM DocuConverter™ is a trademark of CEM S.p.A. 06/09

