

DocuPrint 205/255/305
DocuPrint 240A/340A
Software Pack Operation Guide

For use with the Software Pack CD-ROM

Microsoft, Windows, Windows NT, Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Adobe, Adobe Type Connection, Acrobat, PostScript, the PostScript logo are trademarks of Adobe Systems Incorporated.

Macintosh, Apple, AppleTalk, EtherTalk, Mac OS, TrueType are trademark of Apple Computer, Inc., registered in the U.S. and other countries.

Novell, Netware are registered trademark of Novell, Inc., in the United States and other countries.

HP-GL is a registered trademarks of Hewlett-Packard Corporation.

All product/brand names are trademarks or registered trademarks of the respective holders.

Permission has been obtained from Microsoft Corporation for use of software screen shots.

Important

1. This manual is copyrighted with all rights reserved. Under the copyright laws, this manual may not be copied or modified, in whole or part, without the written consent of the publisher.
2. Parts of this manual are subject to change without prior notice.
3. We welcome any comment on ambiguities, errors, omissions, or missing pages.
4. Never attempt any procedure on the machine that is not specifically described in this manual. Unauthorized operation can cause faults or accidents. Fuji Xerox is not liable for any problems resulting from unauthorized operation of the equipment.

Xerox, The Document Company and the stylized X are registered trademarks of Xerox Corporation.

All Xerox and Fuji Xerox product names are either registered trademarks or trademarks of Xerox Corporation and Fuji Xerox Co., Ltd.

Preface

Thank you for choosing this printer.

This manual describes how to use and install this printer Software Pack CD-ROM (referred to as Software Pack CD-ROM hereafter) bundled with this printer, on Windows® 95, Windows® 98, Windows® Me, Windows NT® 4.0, Windows® XP, Windows® 2000 and Windows Server™ 2003. Read this manual if you need to confirm the operations of the Software Pack CD-ROM.

To get the most out of your printer, read the manual carefully and completely before using the machine. This manual is written with the assumption that you are familiar with the basics of your computer to be connected, the operating system and the application software. You may also refer to the respective manuals regarding the operation of these products.

Contents

- ◆ Preface
- ◆ Contents
- ◆ Using This Guide

Chapter 1 Software Pack CD-ROM

1.1	Using the Software Pack CD-ROM.....	2
1.1.1	Target Operating Systems.....	2
1.1.2	Using the Software Pack CD-ROM	3
1.1.3	File Structure of the CD-ROM.....	4

Chapter 2 Installing from Fuji Xerox Setup Menu

2.1	Installing the Printer Driver (Install Printer Driver Button).....	8
2.2	Deleting the Installed Printer Icon (Delete Printer Button).....	14
2.3	Installing TCP/IP Direct Print Utility (Install TCP/IP Direct Print Utility Button).....	16
2.4	Setting Up the Port	19
2.4.1	Setting Up the TCP/IP Direct Print Utility Port.....	19
2.4.2	Setting Up the protocol for Port9100.....	23
2.4.3	Setting Up the USB Port	25

Chapter 3 Useful Tools and Their Usage

3.1	Installing the Printer Driver with the Same Settings to Multiple Computers.....	32
3.1.1	Creating a Setup Disk	32
3.1.2	Using the Created Setup Disk for Installation	38
3.2	Uninstalling the Printer Driver.....	40
3.3	Starting up in the Command Mode.....	43
3.3.1	Installing the Printer Driver - Command Mode	43
3.3.2	Installing the Printer Driver by Using the Created Setup Disk - Command Mode	44
3.3.3	Deleting the Installed Printer Icon - Command Mode	45
3.3.4	Uninstalling the Installed Printer Driver - Command Mode	46
3.4	Using the IP Address Setting Tool.....	47
3.5	Installing Netware Setup Wizard.....	48

◆ Index	49
---------------	----

Using This Guide

This section describes the organization of this guide.

What You Need to Know

This guide assumes that the operator has a basic knowledge of the operating environment of the computer in use.

For details about the environment of the personal computer in use, refer to the user guides provided with the personal computer, operating system.

Organization of This Guide

This manual consists of three chapters. A brief introduction of each chapter is provided below.

Chapter 1 Software Pack CD-ROM

This chapter provides information about the target operating systems of the CD-ROM, the file structure and an overview of the dialog boxes that appear in the beginning.

Chapter 2 Installing from Fuji Xerox Setup Menu

This chapter describes the procedures on how to install software from the Fuji Xerox Setup Menu dialog box.

Chapter 3 Useful Tools and Their Usage

This chapter explains how to install a printer driver with the same settings on multiple computers, how to use the Network Utility and how to start up the computer in the command mode.

Conventions

1. In this guide, “computer” refers to personal computer, Macintosh, workstation, and host device.

2. The following icons are used in this guide.



Indicates important information which you should read.



Indicates additional information about operations or features.



Indicates reference sources.

3. The following conventions are used in this guide.

Bold: Indicates selections and all kinds of buttons.

Example: Click **Next**.

“ ” : Indicates reference to a chapter or section.

Chapter

1

Software Pack CD-ROM

1.1 Using the Software Pack CD-ROM 2

1.1 Using the Software Pack CD-ROM

1.1.1 Target Operating Systems

The target operating systems (OS) are as follows:

- Microsoft® Windows® 95
- Microsoft® Windows® 98
- Microsoft® Windows® Millennium Edition
- Microsoft® Windows NT® Version 4.0
- Microsoft® Windows® 2000
- Microsoft® Windows® XP
- Microsoft® Windows Server™ 2003


1.1.2 Using the Software Pack CD-ROM

- Install the printer driver.

See
p.8

- Install TCP/IP Direct Print Utility.

See
p.16

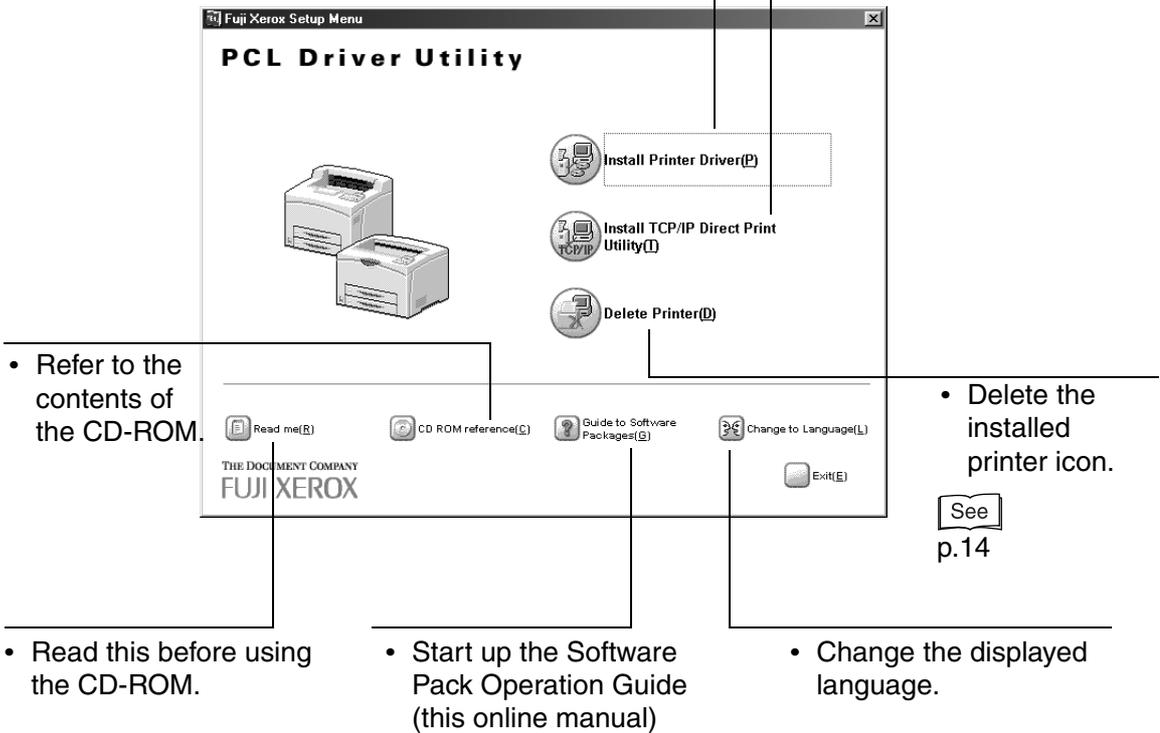

- Refer to the contents of the CD-ROM.

- Delete the installed printer icon.

See
p.14

- Read this before using the CD-ROM.

- Start up the Software Pack Operation Guide (this online manual)

- Change the displayed language.

1.1.3 File Structure of the CD-ROM


The following software applications are included in the Software Pack CD-ROM:

LOOK

There may be changes in the structure of the software with future upgrades.



-  **AcroRead**
Adobe® Acrobat® Reader 5.0E is included.
Acrobat Reader is used for displaying PDF files on screen and printing them.
-  **Cbridge**
Contains software required in order to use PDF DirectPrint.
-  **Dpu_E**
TCP/IP Direct Print Utility is included.
-  **EzInst**
Contains software required for installation for each language.
The following tools are included:
 - MakeDisk.exe · · · Startup file to create the Setup Disk.
 - UnInst.exe · · · Startup file to uninstall the printer driver.
-  **ManualE/ManualKO/ManualSC/ManualTC**
The manuals are included.
-  **NetUtil**
Network Utility is included.
 - IP Setup Tool
 - NetWare

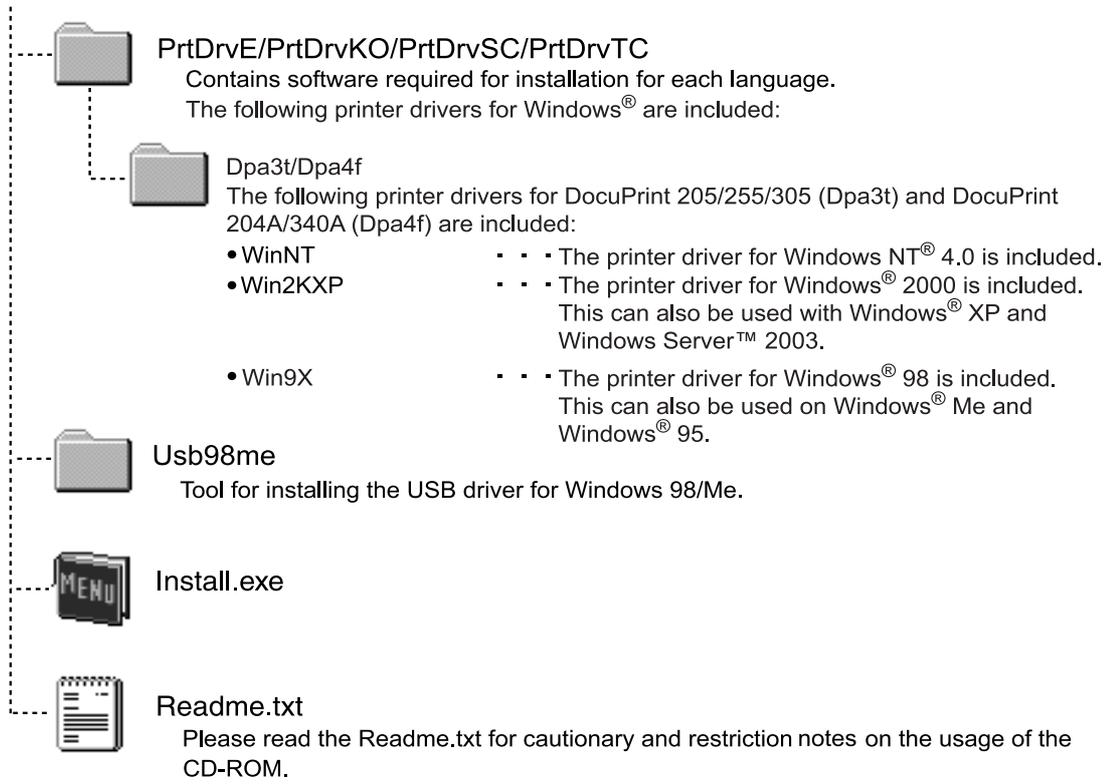

Chapter

2

Installing from Fuji Xerox Setup Menu

- 2.1 Installing the Printer Driver (Install Printer Driver Button) 8
- 2.2 Deleting the Installed Printer Icon (Delete Printer Button) 14
- 2.3 Installing TCP/IP Direct Print Utility (Install TCP/IP Direct Print Utility Button)..... 16
- 2.4 Setting Up the Port 19

2.1 Installing the Printer Driver (Install Printer Driver Button)

Install the printer driver to the computer after you have set up the printer.

This printer driver is a software for converting print data or instruction on the computer to data that can be interpreted by the printer.

Click on the **Install Printer Driver** button on the Fuji Xerox Setup Menu dialog box to automatically select and install the printer driver suitable for the OS of the computer.

The section below explains the procedure to install the printer driver.

Note

- If you want to install the printer driver with the same settings to multiple computers, you are recommended to create a setup disk.
- When installing the USB driver for Windows 98 or Windows Me, open the USB98ME folder on the Software Pack CD-ROM and launch Setup.exe. Refer to “2.4.3 Setting Up the USB Port” (P. 25) for details.

See


“3.1 Installing the Printer Driver with the Same Settings to Multiple Computers” (P. 32)

Procedure


Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

- 1** If a virus-scan software has been installed, either uninstall it or switch it off.
- 2** Insert the Software Pack CD-ROM into the CD-ROM drive.
The Fuji Xerox Setup Menu appears automatically.
- 3** Click **Read me** to open the Readme.txt in the Software Pack CD-ROM.

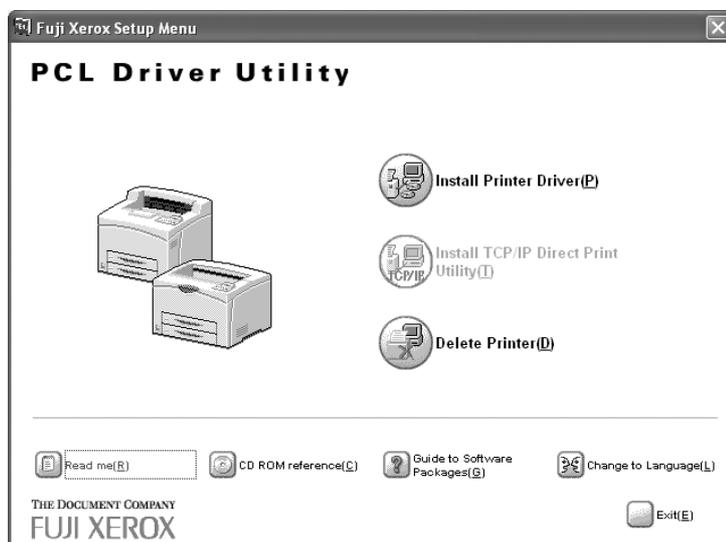


- 4 Check the contents and close the Readme.txt.
- 5 Click **Install Printer Driver**.

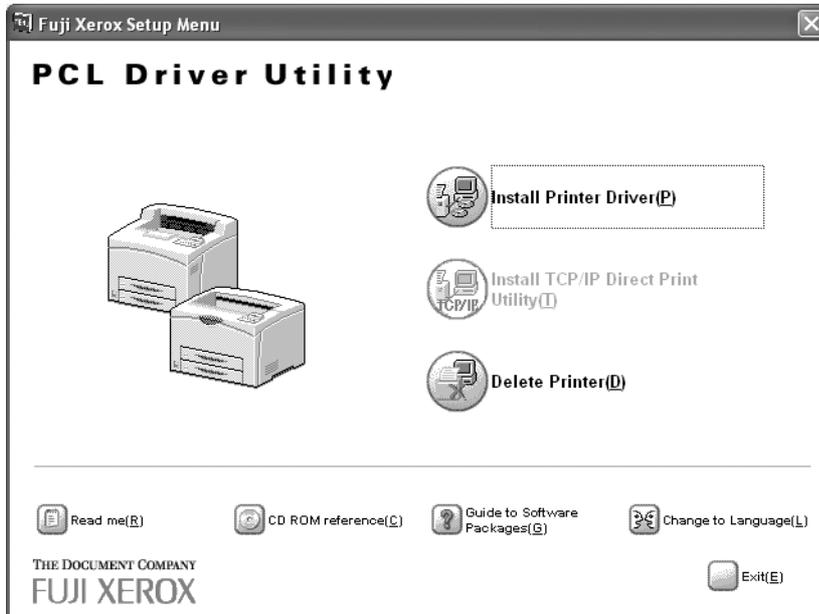

The Driver Setup dialog box is displayed.

- 6 On the Driver Setup dialog box, select your printer model in Select a model, then click **Install printer driver**.

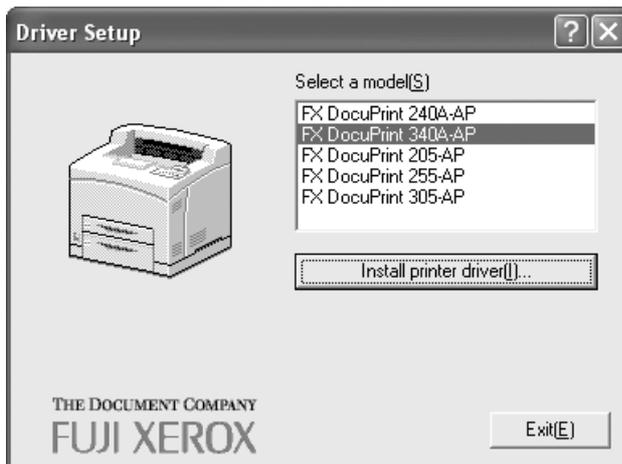


The searching for a printer starts.



2.1 Installing the Printer Driver (Install Printer Driver Button)

■ When the printer has been found

1. Click **Next** in the displayed screen.

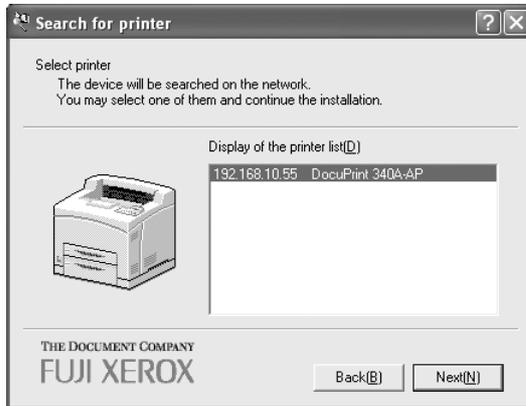

The printer driver settings screen is displayed and the options that are installed to the printer are set automatically.


2. Specify the following:

- Printer name
Enter a name for the printer, if necessary.

Note


If the printer name is not entered, it will be FX DocuPrint 205-AP/255-AP/305-AP/240A-AP/340A-AP.

- Make this the default printer
Check the check box if this printer is to be used as the default printer.

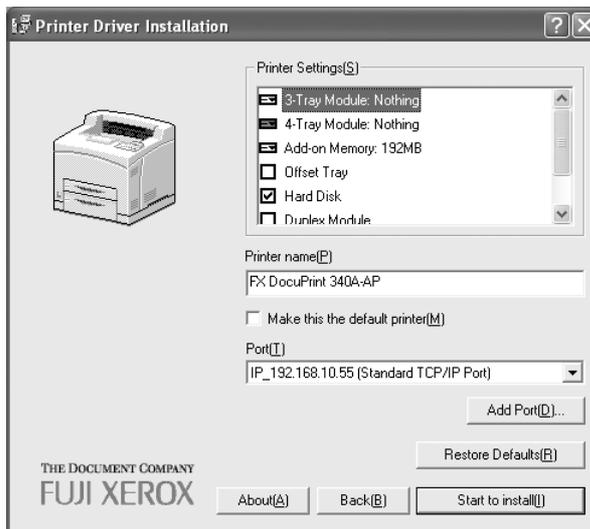


- When the printer has not been searched or the printer is connected directly to the computer

1. Click **OK** in the displayed dialog box.

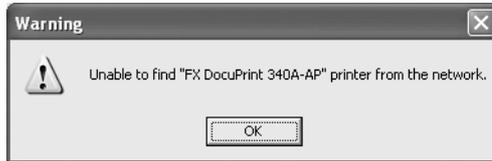

The dialog box that confirms to continue installation is displayed.

2. Click **Ignore** in the displayed dialog box.



Click Abort to quit the installation, or click Retry to search the printer again.


3. Specify the following:

- Printer Settings
Check the optional products that you have purchased and installed.
- Printer name
Enter a name for the printer, if necessary.

Note

If the printer name is not entered, it will be FX DocuPrint 205-AP/255-AP/305-AP/240A-AP/340A-AP.

- Make this the default printer
Check the check box if this printer is to be used as the default printer.

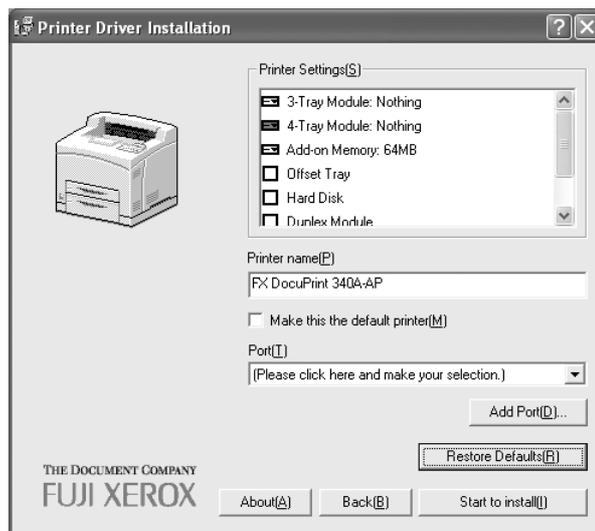


7 Specify the Port for output destination.

■ For Windows 95/Windows 98/Windows Me


1. Select **Others** if the printer is to be used as a local printer (the printer and the computer are directly connected by a parallel cable). Then click **Browse**.

Note

Refer to the Network Print Environment User Guide (Network.pdf) if the printer is to be used as a network printer.

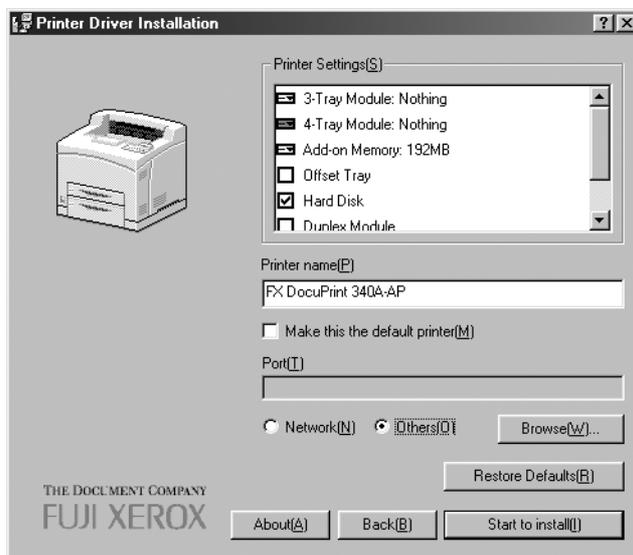

2. Select LPT1: from the list and click **OK**.

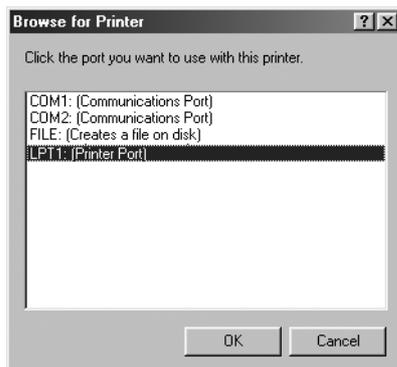


■ For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003

1. Click ▼ next to Port if the printer is to be used as a local printer (the printer and the computer are directly connected by a parallel cable). Select **LPT1: (Local Port)** from the list displayed.

Note

Refer to the Network Print Environment User Guide (Network.pdf) if the printer is to be used as a network printer.

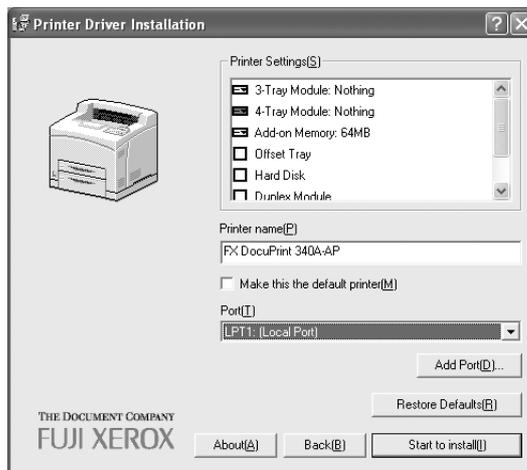


- 8 Confirm that the port name specified in Step 7 is shown in the Port drop-down list box of the Printer Driver Installation dialog box.

Then click **Start to install**.

The installation of the printer driver begins.

- 9 When the installation is completed, the following dialog box will be displayed. Click **Yes** to restart the computer.

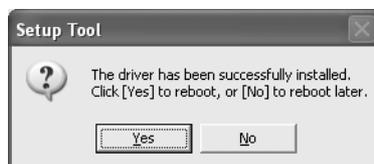

- 10 Open the Printers and Faxes (or Printers) window to confirm that the icon for the printer selected in Step 6 is added.

Note

From the Start menu, click **Printers and Faxes** (or Settings > **Printers** depending on the OS) to display the Printers and Faxes (or Printers) window.


- 11 Take out the CD-ROM from the CD-ROM drive.

This completes the installation of the printer driver.

- 4 From the Deleting Printer dialog box, select the printer you use and click **Delete**.



- 5 Check the contents and click **Yes**.

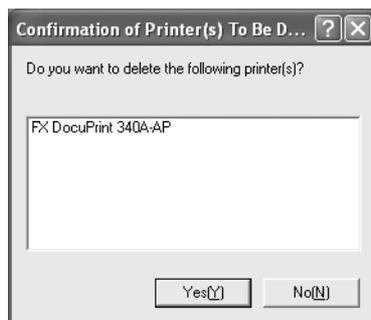

- 6 When the printer icon is deleted, the following dialog box will be displayed.
Click **OK**.



- 7 Open the Printers and Faxes (or Printers) window and confirm that the printer selected in Step 4 is deleted.


Note

From the Start menu, click **Printers and Faxes** (or Settings > **Printers** depending on the OS) to display the Printers and Faxes (or Printers) window.

- 8 Click **Exit** on the Fuji Xerox Setup Menu dialog box.

- 9 Take out the CD-ROM from the CD-ROM drive.
This completes the deletion of the installed printer icon.

3 Click **Install TCP/IP Direct Print Utility**.

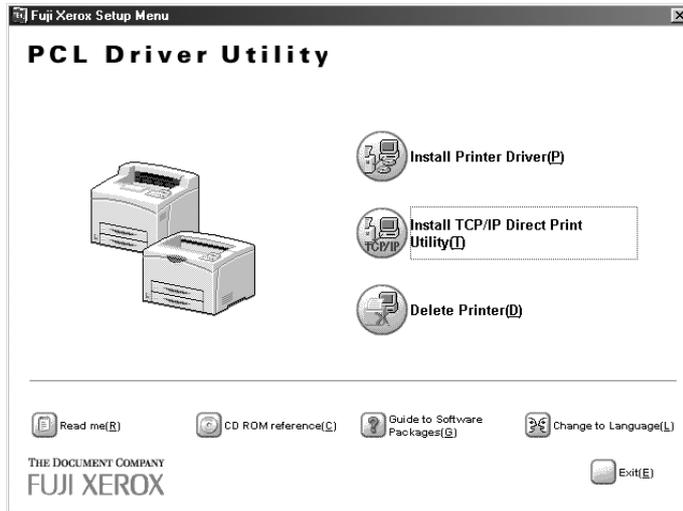


LOOK

If you are prompted to install TCP/IP protocol when Install TCP/IP Direct Print Utility is clicked, click **OK** to stop the operation, and after you have installed TCP/IP protocol to your computer, carry out the installation again.


See

The manuals related to Windows on how to install TCP/IP protocol

4 Click **Next**.

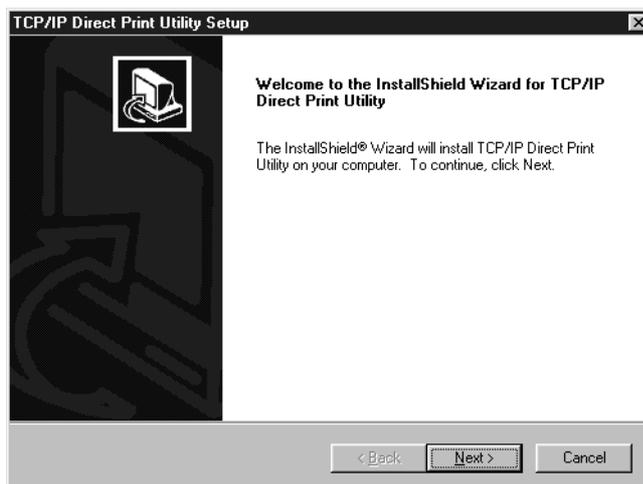

- 5 Check the path under Destination Folder, and click **Next** if it is all right.

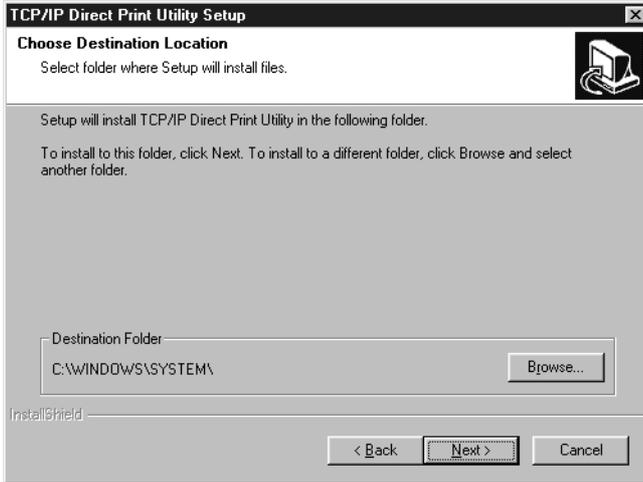


The installation of TCP/IP Direct Print Utility begins.

- 6 When the installation is completed, the following dialog box is displayed. Take out the CD-ROM from the CD-ROM drive. Select **Yes, I want to restart my computer now**, and then click **Finish**.




Note
The settings will not take effect if you do not restart the system.

- 4 Select **Other**, and click **FX TCP/IP DPU Port** from “Click the type of port you want to add”.

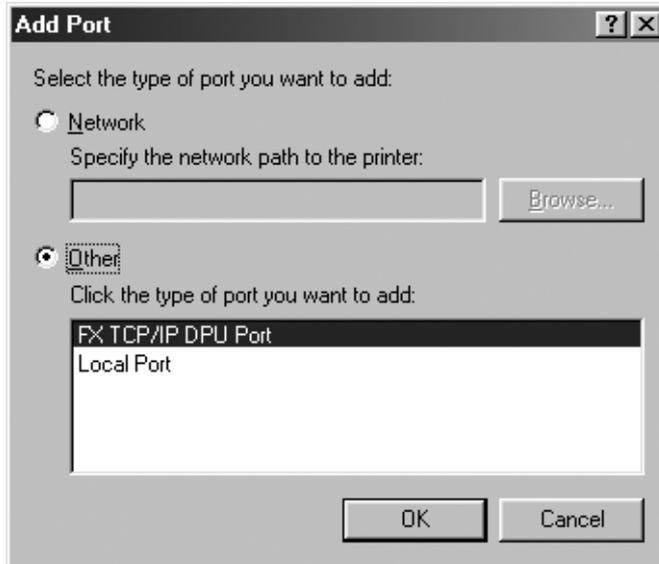

- 5 Click **OK**.
The FX TCP/IP Direct Print Utility Port Setup dialog box is displayed.
- 6 Enter the appropriate value for each item, and click **OK**.
Example: For port name, “Trans5” and IP address, “192.168.10.55”.

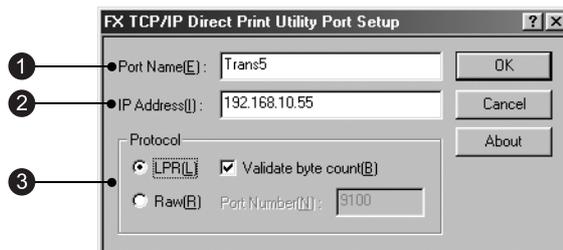


Item	Remarks
① Port Name	<p>Enter a name of your choice to identify the printer.</p> <p>LOOK</p> <p>When you are adding multiple TCP/IP Direct Print Utility ports, do not use port names as in the following. There is no difference between using upper-case and lower-case characters. Examples of port names that cannot be used (current port name is “printer”):</p> <ul style="list-style-type: none"> • Adding characters at the end of the current port name. Example: “printer1”, “printer-01” and so forth. • Deleting some characters from the current port name. Example: “prin”, “print” and so forth.
② IP Address	<p>Enter the IP address of the printer. If the Domain Name System (DNS) has been installed, the printer host name can be entered.</p>
③ Protocol	<p>Select the protocol to be used for data transfer. Select either of printing protocols (1) or (2) below. The default selection is (1) LPR.</p> <p>(1) “LPR”: The lpr protocol is used for printing. Enable or disable the “Validate byte count” option by selecting or deselecting its check box. The default selection is enabled (check box selected).</p> <p>(2) “Raw”: Port9100 protocol is used for printing. You can specify a port number at the destination in “Port Number”. This setting is effective only when Raw protocol is selected. The default setting is “9100”. If the number is deleted, “9100” appears. You can enter up to 5 digits. If you enter a number greater than 65536 and click OK, “9100” is registered.</p>

Note


If you do not know the IP address of the printer, check with your network administrator, or print out the System Settings list. Refer to the Setup and Quick Reference Guide.

- 7 On the Details tab of the Properties dialog box, check that “(FX TCP/IP DPU Port)” appears in “Print to the following port” together with the port name entered in Step 6.

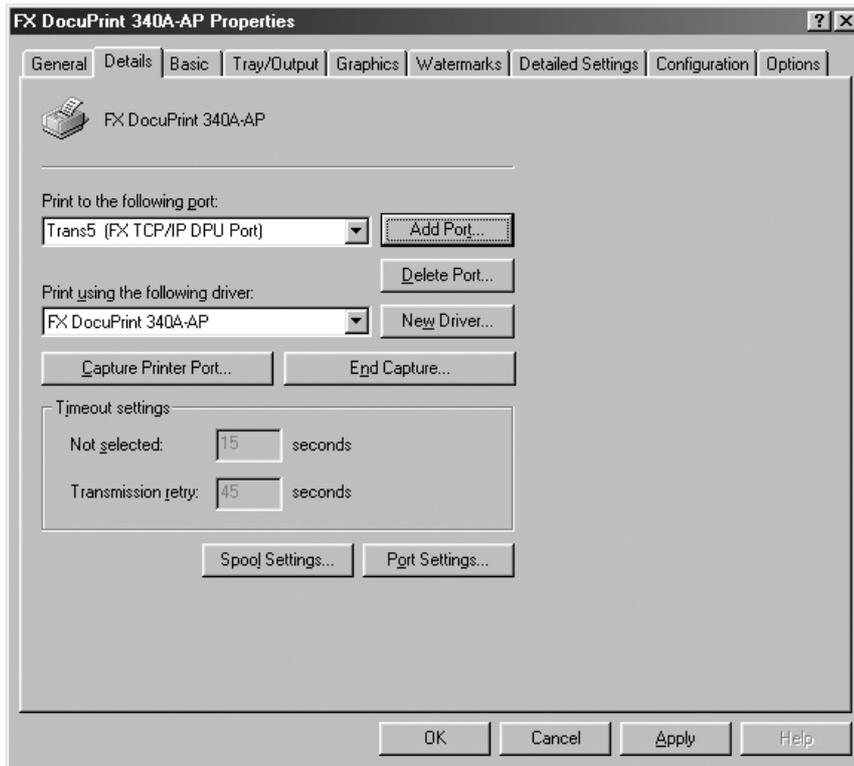


- 8 To check the connection, print the test page.
After you have clicked **Apply** to confirm the settings, click **Print Test Page** on the General tab.
A dialog box is displayed to confirm whether or not the test page has been printed correctly.
- 9 Check the print results, and if the test page is printed correctly, click **Yes**.
- 10 Click **OK** on the Properties dialog box.


3 Select the **Ports** tab, then click **Configure Port**.

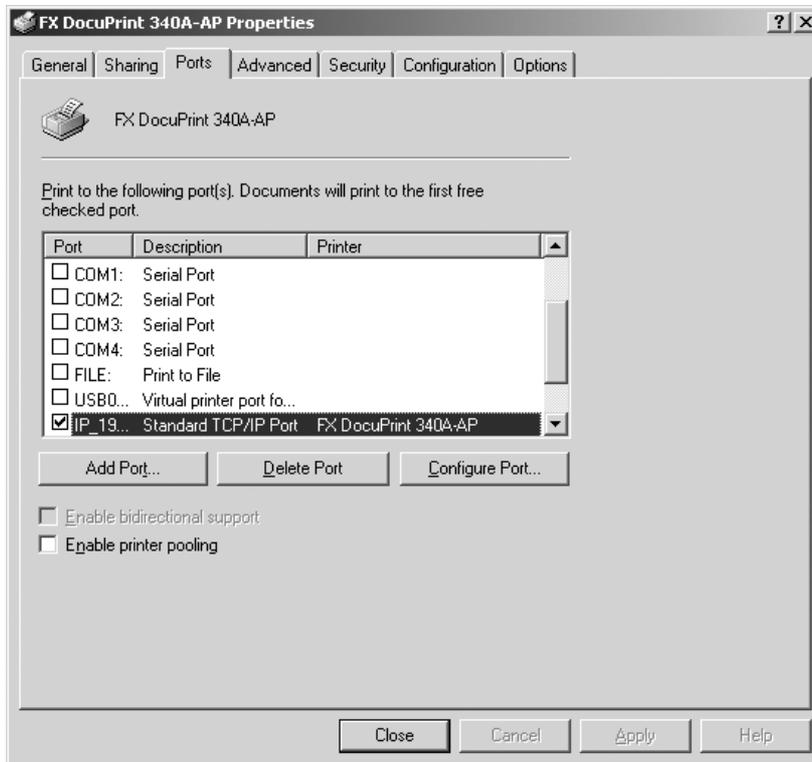


4 Select **Raw** for Protocol. Make sure that the displayed port number is the same as the number specified at the printer. Click **OK**, and then **Apply** on the dialog box displayed to save your setting.

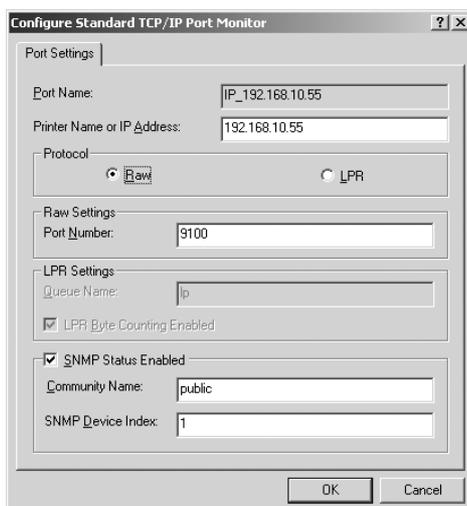

- 5** Click **Next**.
The installation starts.

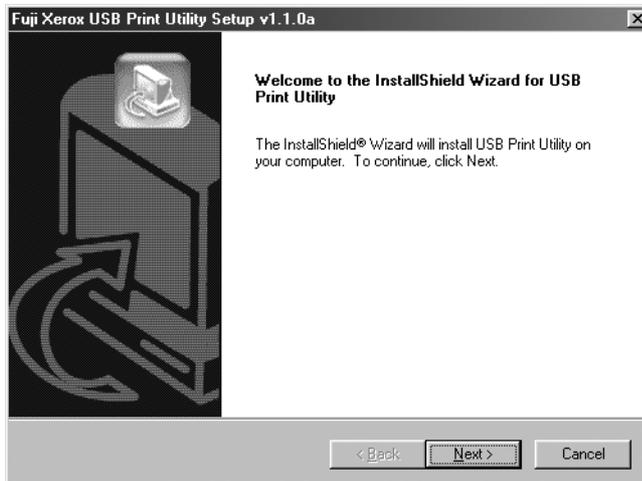

- 6** Select **Yes, I want to restart my computer now** and then click **Finish**.

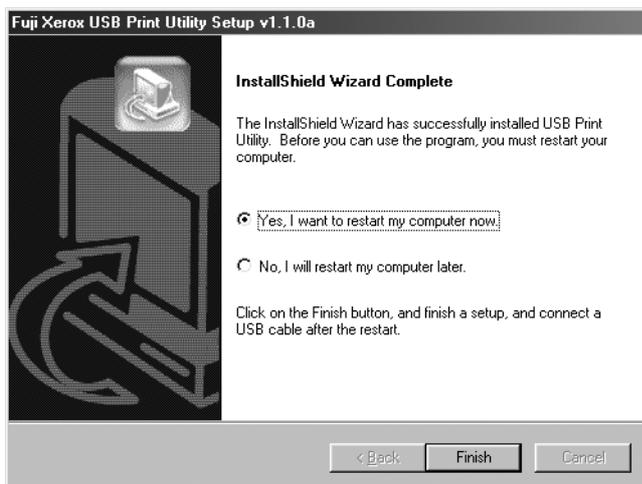


- 7** After restarting up your computer, run Windows 98 or Me. Then, from the **Start** menu, click **Settings** and then **Printers**.
- 8** Click the icon of this printer, and then click **Properties** from the **File** menu.

- 5 From the **Start** menu, click **Settings** and then **Printers**.
- 6 Click the icon for this printer, and then click **Properties** from the **File** menu.
- 7 Click the **Details** tab, then select **FXUSB_x_DocuPrint 340AAP: (USB Printer Port)** from the **Print to the following port**.
- 8 Click **OK**.

Useful Tools and Their Usage

3.1	Installing the Printer Driver with the Same Settings to Multiple Computers.....	32
3.2	Uninstalling the Printer Driver.....	40
3.3	Starting up in the Command Mode.....	43
3.4	Using the IP Address Setting Tool.....	47
3.5	Installing Netware Setup Wizard.....	48

- 4 Check the contents and close the Readme.txt.
- 5 Click **CD ROM reference** to browse the contents. Then open the EzInst folder. Double-click **MakeDisk.exe**.

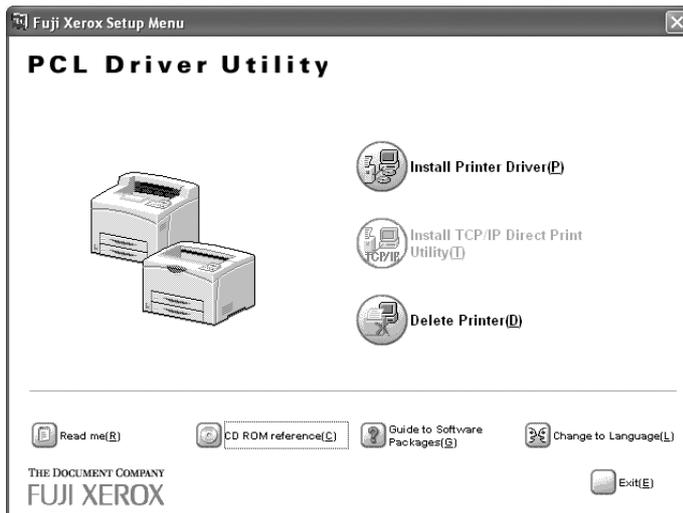

The Creating Setup Disk dialog box is displayed.

- 6 From **Select a printer**, select the printer for which to create the setup disk. Click **Create disk**.

Note

Click **Open printer folder** if you want to change the various settings of the printer. Select the printer icon and go to the various tabs of the printer properties dialog box to configure the settings.



The Setup Disk Settings dialog box is displayed.


7 Specify the following:

- Comment
Enter comments, if any.
- Printer name
Enter a name for the printer, if necessary.

Note

If the printer name is not entered, it will be FX DocuPrint 205-AP/255-AP/305-AP/240A-AP/340A-AP.

- Make this the default printer
Check the check box if this printer is to be used as the default printer.

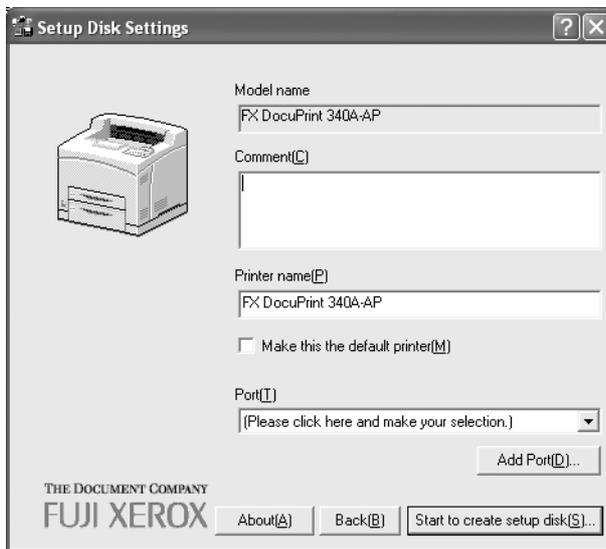


8 Specify the Port for output destination.

■ For Windows 95/Windows 98/Windows Me


1. Select Others if the printer is to be used as a local printer (the printer and the computer are directly connected by a parallel cable). Then click **Browse**.

Note

Refer to the Network Print Environment User Guide (Network.pdf) if the printer is to be used as a network printer.

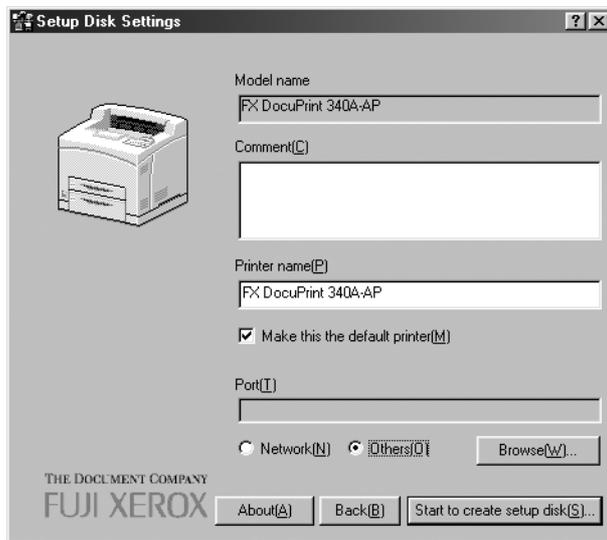

2. Select **LPT1:** from the list and click **OK**.

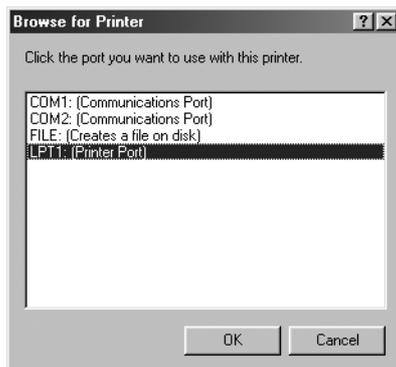


■ For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003

1. Click ▼ next to Port if the printer is to be used as a local printer (the printer and the computer are directly connected by a parallel cable). Select **LPT1: (Local Port)** from the list displayed.

Note

Refer to the Network Print Environment User Guide (Network.pdf) if the printer is to be used as a network printer.

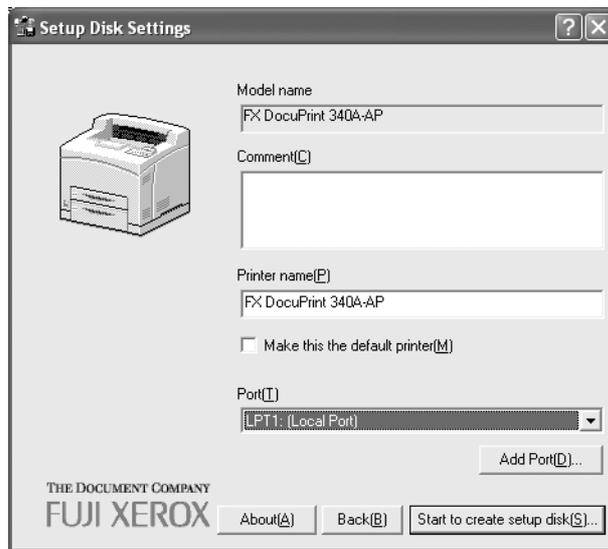

- 9 Confirm that the port name specified in Step 8 is shown in the Port drop-down list box of the Setup Disk Settings dialog box.

Click **Start to create setup disk**.


The Setup Disk Directory Selection dialog box is displayed.

- 10** Click **Browse** and select the drive or folder on which to create the setup disk. Then click **OK**.

Example: When the floppy disk drive is selected

Note

If you select the floppy disk drive, insert a floppy disk in the disk drive, then specify.

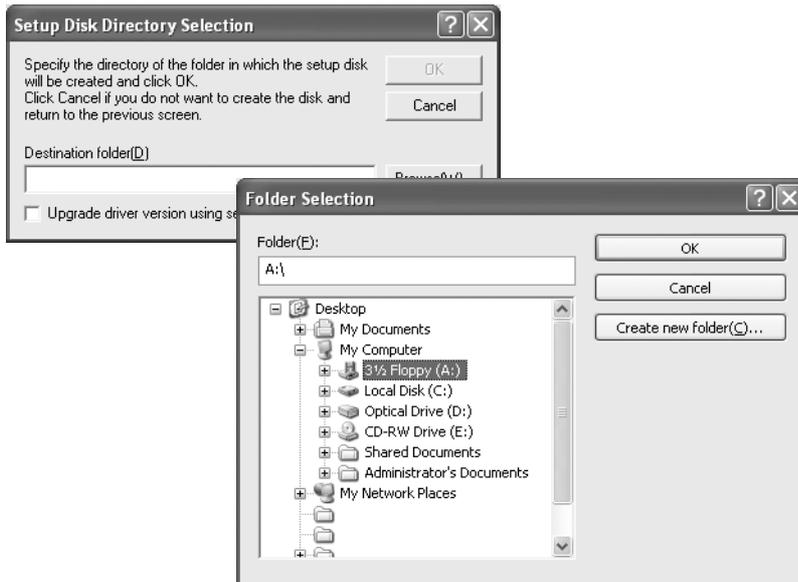

- 11** Click **OK** on the Setup Disk Directory Selection dialog box. The creation of the setup disk begins.


- 12** When the installation is completed, the following dialog box will be displayed. Click **OK**.



- 13** Click **Exit** on the Creating Setup Disk dialog box, then click **Exit** on the Fuji Xerox Setup Menu dialog box.

This completes the creation of the setup disk.

6 Confirm the contents and click **Start to install**.

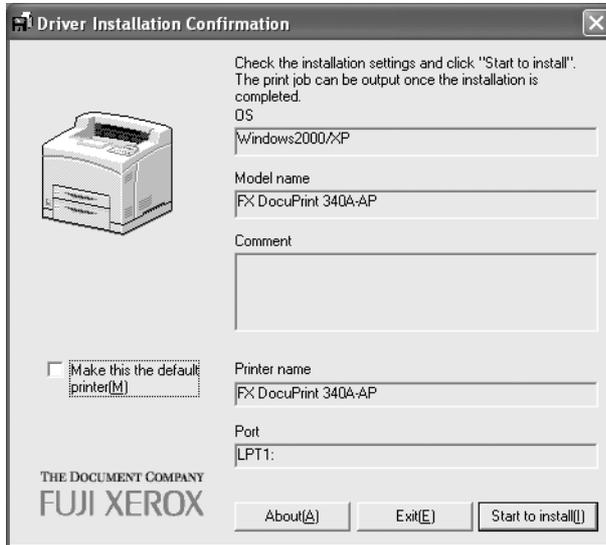


The installation begins.

Note

If the printer is used as a network printer, depending on the network environment, a dialog box prompting the port settings will be displayed. Follow the instructions to set the port.

7 When the installation is completed, the following dialog box will be displayed. Click **Yes** to restart the computer.

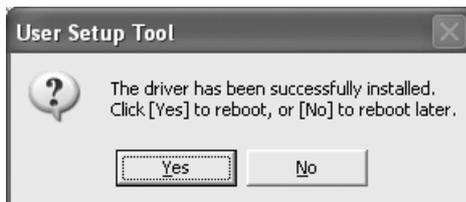

8 Open the Printers and Faxes (or Printers) window to confirm that the icon for DocuPrint 205/255/305/240A/340A is added. This completes the installation of the printer driver.

Note

From the Start menu, click **Printers and Faxes** (or Settings > **Printers** depending on the OS) to display the Printers and Faxes (or Printers) window.

9 Take out the floppy disk from the floppy disk drive. This completes the installation of the printer driver.

3.2 Uninstalling the Printer Driver

You can delete the installed DocuPrint 205/255/305/240A/340A printer driver and all its related files.

Note


If there are multiple printer icons, refer to “2.2 Deleting the Installed Printer Icon (Delete Printer Button)” (P. 14) to delete only the specified printer icon.

Procedure

Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

- 1 If a virus-check software has been installed, either uninstall it or switch it off.
- 2 Insert the Software Pack CD-ROM into the CD-ROM drive.
The Fuji Xerox Setup Menu appears automatically.
- 3 Click **CD ROM reference** to browse the contents. Then open the EzInst folder. Double-click **UnInst.exe**.

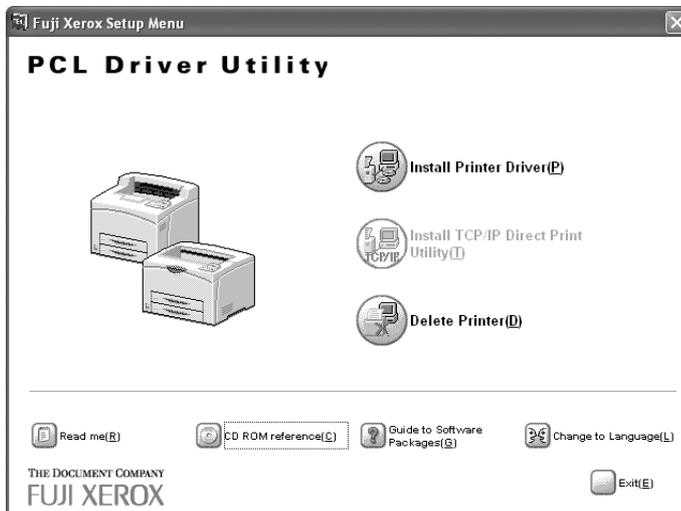

The Deleting Driver dialog box is displayed.

- 4** Select the printer driver to be deleted from Driver(s) to be deleted, then click **Delete**.



The Confirmation of Driver(s) To Be Deleted dialog box is displayed.

- 5** Check the contents and click **Yes**.



The deletion of the printer driver begins.

- 6** When the printer driver is deleted, the following dialog box will be displayed.

Click **OK**.



- 7** Open the Printers and Faxes (or Printers) window to confirm that the icon of the printer selected in Step 4 is deleted. This completes the uninstallation of the printer driver.

Note

From the Start menu, click **Printers and Faxes** (or Settings > **Printers** depending on the OS) to display the Printers and Faxes (or Printers) window.

- 8** Take out the CD-ROM from the CD-ROM drive.
This completes the uninstallation of the printer driver.

3.3

Starting up in the Command Mode

The following can be started up by entering the command in the EzInst folder of the CD-ROM directly (in command mode).

LOOK

The command mode is a start up method and can be used in operations such as batch processing.

See

- Installing the printer driver P. 43
- Installing the printer driver by using the created setup disk P. 44
- Deleting the installed printer icon P. 45
- Uninstalling the installed printer driver P. 46

3.3.1 Installing the Printer Driver - Command Mode

Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

Command line	SETUP Δ /m Model ID (Δ indicates spacing)
Parameter	/m Specify the model ID and run setup. It can be specified in upper or lower case, single byte characters.
Model ID	Enter the ID of the model to be installed after the option (/m)

LOOK

Enter the model ID in upper case, single byte characters.

Model ID	Model to be installed
FXDP240	DocuPrint 240A-AP
FXDP340	DocuPrint 340A-AP
FXDP205	DocuPrint 205-AP
FXDP255	DocuPrint 255-AP
FXDP305	DocuPrint 305-AP

Startup example	SETUP Δ /mFXDP305 (when installing DocuPrint 305 printer driver)
Error Display	When you have entered an incorrect parameter, a "Invalid parameter" dialog box will appear. In this case, click OK to end the operation.

3.3.2 Installing the Printer Driver by Using the Created Setup Disk - Command Mode

See

If the setup disk has not been created, see “3.1 Installing the Printer Driver with the Same Settings to Multiple Computers” (P. 32) to create the setup disk.

Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

Command line	SETUP Δ /c (Δ indicates spacing)
Parameter	/c Install without displaying any dialog boxes or messages. It can be specified in upper or lower case, single byte characters.
Error Display	When you have entered an incorrect parameter, a “Invalid parameter” dialog box will appear. In this case, click OK to end the operation.

This command returns the following completion codes:

Value	Explanation
0	Completed without error.
1	Incorrect contents in configuration file.
2	Driver file to be installed does not exist.
3	Specified port does not exist.
4	Cannot overwrite the driver file.
5	Unable to add printer.
6	Unable to write to disk.
7	Unable to upgrade.
8	Driver of different version exists.
10	No administrator rights (Windows NT/Windows 2000/Windows XP).
-1	Other errors.

3.3.3 Deleting the Installed Printer Icon - Command Mode

Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

Command line	DELPRN Δ (printer icon name) (Δ indicates spacing)
Parameter	Printer icon name Specify the printer icon name in the Printers and Faxes (or Printers) window. You can specify more than one name.
Startup example	DELPRN Δ "DocuPrint 305-AP" Δ "DocuPrint 340A-AP" (when deleting two printer icons, DocuPrint 305 and DocuPrint 340A)
	LOOK Enter the icon name within " " (double quotes) if space is included in the printer icon name.
Error Display	When you have entered an incorrect parameter, a "Invalid parameter" dialog box will appear. In this case, click OK to end the operation.

This command returns the following completion codes:

Value	Explanation
0	Completed without error.
1	Specified printer icon does not exist. (Also in the case when the printer icon specified is that of an unsupported printer driver.)
10	No administrator rights (Windows NT/Windows 2000/Windows XP).
-1	Other errors.

3.3.4 Uninstalling the Installed Printer Driver - Command Mode

Note

For Windows NT 4.0/Windows 2000/Windows XP/Windows Server 2003, log on as a user of the administrator group or as the administrator.

- Command line UNINST Δ /m Model ID (Δ indicates spacing)
- Parameter /m Specify the installed printer (model ID) and uninstall. It can be specified in upper or lower case, single byte characters.
- Model ID Enter the ID of the model to be uninstalled after the option (/m)

LOOK

Enter the model ID in upper case, single byte characters.

Model ID	Model to be installed
FXDP240	DocuPrint 240A-AP
FXDP340	DocuPrint 340A-AP
FXDP205	DocuPrint 205-AP
FXDP255	DocuPrint 255-AP
FXDP305	DocuPrint 305-AP

- Startup example UNINST Δ /mFXDP305
(when deleting the DocuPrint 305 printer driver)
- Error Display When you have entered an incorrect parameter, a “Invalid parameter” dialog box will appear. In this case, click OK to end the operation.

The command returns the following completion codes:

Value	Explanation
0	Completed without error.
1	Specified printer driver does not exist.
10	No administrator rights (Windows NT/Windows 2000/Windows XP).
-1	Other errors.

3.5 Installing Netware Setup Wizard

You can change the initial settings and the setting value of the NetWare server and the printer by using this wizard. Use this wizard when setting the environment of the output to the printer with using the NetWare server.


This wizard can be used with running from the CD-ROM.

LOOK

- NetWare Setup Wizard cannot be used on Windows Server 2003.
- Using the NetWare Setup Wizard requires logging on as the administrator of the NetWare.

Procedure

- 1** If a virus-check software has been installed, either uninstall it or switch it off.
- 2** Insert the Software Pack CD-ROM into the CD-ROM drive.
The Fuji Xerox Setup Menu appears automatically.
- 3** Click **CD ROM reference** to browse the contents. Then open the NetWare folder in the NetUtil folder. Double-click **nsw.exe**.

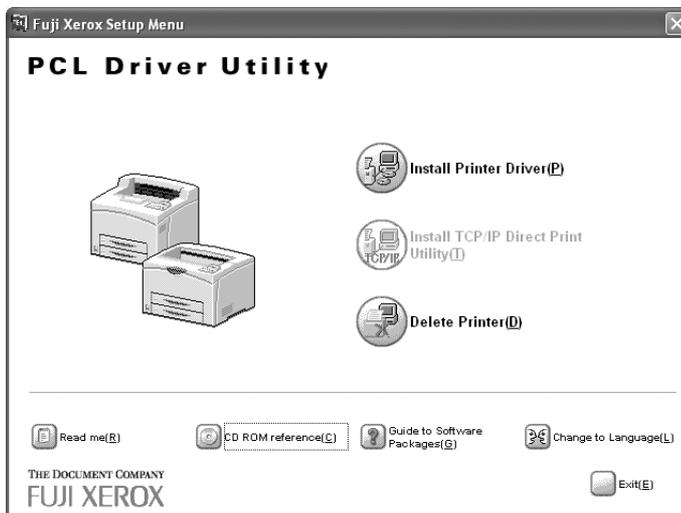

The NetWare Setup Wizard starts.

- 4** Set the setting items as following the messages displayed.

Note

For details about how to use the Netware Setup Wizard, see On-line help of the wizard.

Index

C

- Command Mode43
- Creating a Setup Disk32

D

- Delete Printer 14
- Deleting the Installed Printer Icon 14
- Deleting the Installed Printer Icon
- Command Mode45

F

- File Structure of the CD-ROM4

I

- Installing from Fuji Xerox Setup Menu 7
- Installing Netware Setup Wizard48
- Installing TCP/IP Direct Print Utility 16
- Installing the Printer Driver8
- Installing the Printer Driver
- Command Mode43
- Installing the Printer Driver by Using the Created
Setup Disk - Command Mode44
- Installing the Printer Driver with the Same
Settings to Multiple Computers32
- Installing the USB Print Utility26
- IP Address Setting Tool47

N

- Netware Setup Wizard48

P

- Port910023
- printer driver 8

S

- Setting Up the USB Port25
- Setup Disk32, 38
- Software Pack CD-ROM 1
- Starting up in the Command Mode43

T

- Target Operating Systems2
- TCP/IP Direct Print Utility16
- TCP/IP Direct Print Utility port19

U

- Uninstalling the Installed Printer Driver
- Command Mode46
- Uninstalling the Printer Driver40
- USB port25
- USB print utility26
- Using the Created Setup Disk for Installation
.....38
- Using the IP Address Setting Tool47
- Using the Software Pack CD-ROM3

Customer Response Sheet

Software Pack Operation Guide (ME3237E2-1)

To improve our publications, we would appreciate your feedback regarding this manual. Please take a few moments to complete and return this form to us.

● About yourself

1. How often do you use this manual?

Daily Weekly Monthly Infrequently

2. When do you usually refer to the manual?

Doing a usual operation Using unfamiliar features Solving a problem

3. Which part of the manual do you read frequently?

Chapter/Section/Page:

4. Where do you keep the manual?
(Optional)

Your Name:

Occupation:

Company or organization:

● About the Manual

	Strongly Agree		Neutral		Strongly Disagree
1. It is handy.	1	2	3	4	5
2. It is easy to read.	1	2	3	4	5
3. Titles of chapters and sections make sense.	1	2	3	4	5
4. Information is logically placed.	1	2	3	4	5
5. Referencing is easy.	1	2	3	4	5
6. Content is easy to understand.	1	2	3	4	5
7. The step-by-step instructions are easy to follow.	1	2	3	4	5
8. All necessary information is included.	1	2	3	4	5
9. Illustrations aid in the understanding of content.	1	2	3	4	5
10. The use of color is effective.	1	2	3	4	5

Other comments (if any):

After completing this form, detach and send it to the address below. (Please use your own envelope and postage stamp.) Thank you for your cooperation.

.....

Fuji Xerox Co., Ltd.
KSP R&D 2D7
3-2-1, Sakado, Takatsu-ku
Kawasaki-shi, Kanagawa-ken
JAPAN 213-0012

Software Pack Operation Guide

**Human Interface Design Development
Document Products & Supply Company
Fuji Xerox Co., Ltd.**

**ME3237E2-1 (Edition 1)
December 2003
Copyright© 2003 by Fuji Xerox Co., Ltd.**