

Matchprint

Professional Server

for Xerox DocuColor 12 Printer/Copier

Windows 2000 Server Restore Instructions

Trademarks

©2002 Kodak Polychrome Graphics. All Rights Reserved.

**Matchprint is a trademark of Kodak Polychrome Graphics. Kodak is a trademark of Eastman Kodak Company.
All other trademarks and registered trademarks are the property of their respective owners.**

October 2002. Revision A, MPS v3.0

Overview

This upgrade kit contains everything you need to upgrade your current system from **Windows NT** using **v2.x Matchprint Professional Server** software to **Windows 2000** using **v3.0 Matchprint Professional Server** software.

Upgrade Kit Contents


This kit contains the following items:

- Upgrade Kit Instructions (these instructions)
- MPS v3.0 Ghost CD-ROM
- Norton Ghost Boot Floppy
- Windows 2000 Server Software with Product Key (license number) included.


Important! You must have all kit items prior to beginning the upgrade!

Re-Ghost Instructions


1. Insert the **Norton Ghost Boot floppy** disk, then power on the system.
2. Insert the **MPS v3.0 Ghost CD** into the CD-ROM drive. Wait until the following **About Symantec Ghost** screen displays. At the **About Symantec Ghost** window, click **OK**. A menu screen displays.

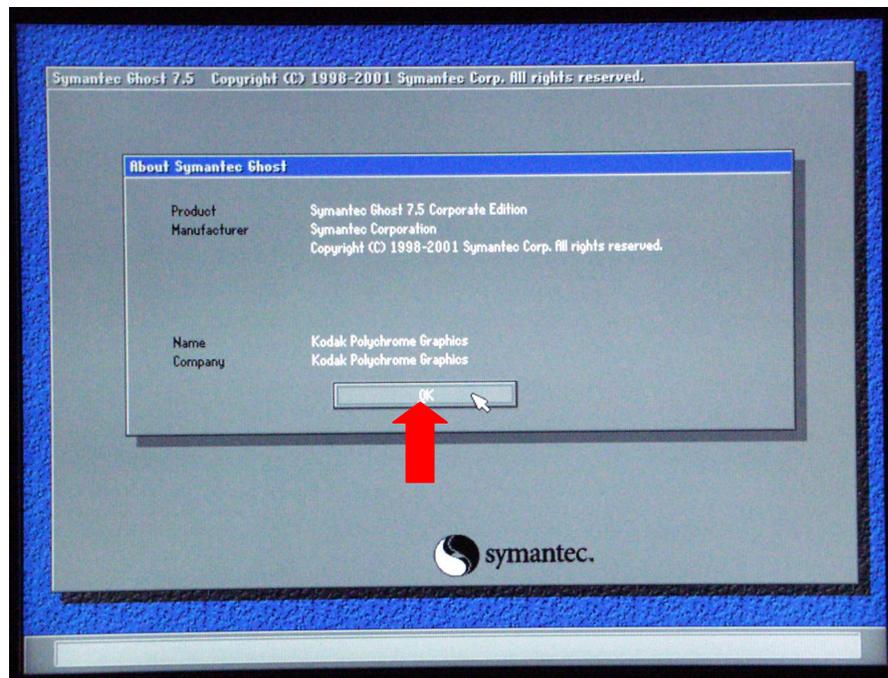


3. At the menu, choose the following path: **Local > Disk > From Image** as shown below:

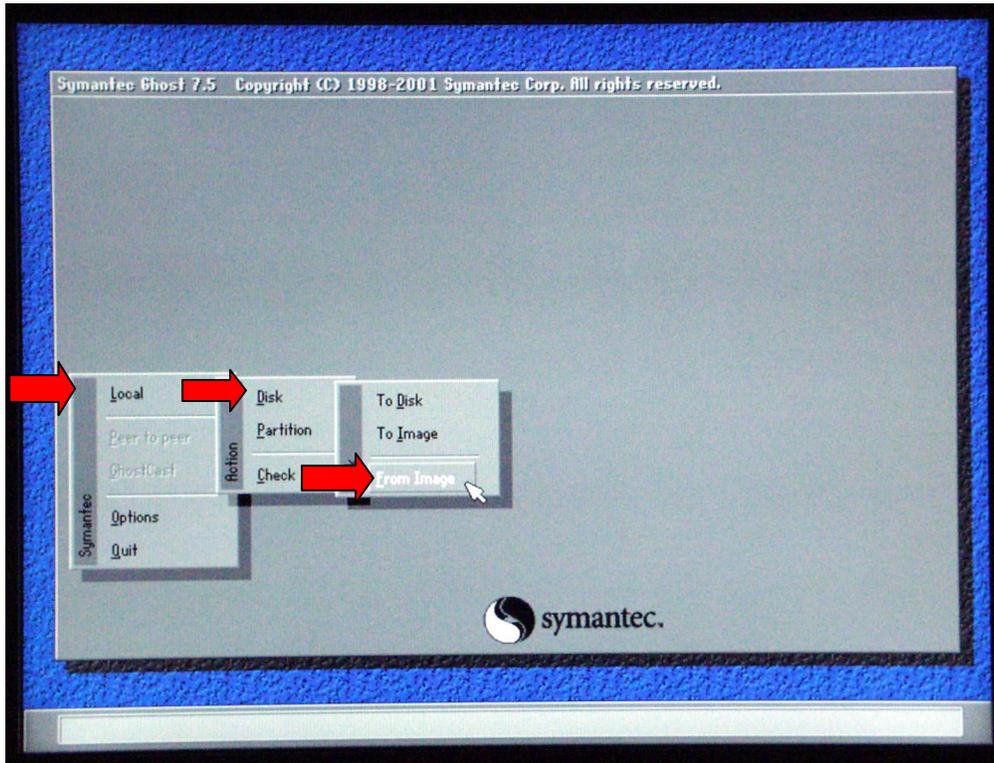


4. At the **Look In** drop-down menu, select **c:[Ghost_00.1] CD Rom drive**. In the lower portion of the window, select **CDR00001.GHO** file.

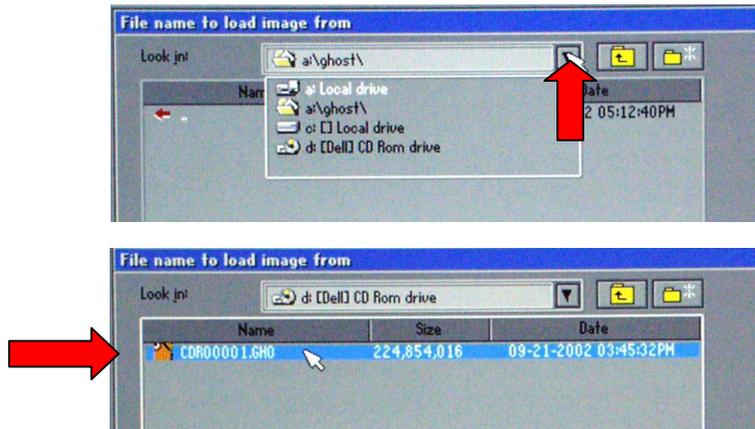


- At the **Select local destination...** window select **Drive 1**, then select **OK**.

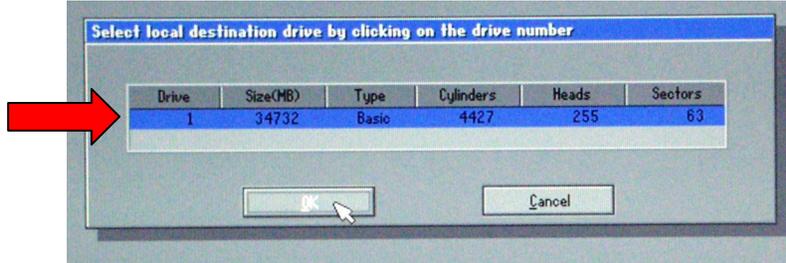


- At the **Destination Drive Details** window, click **OK**.

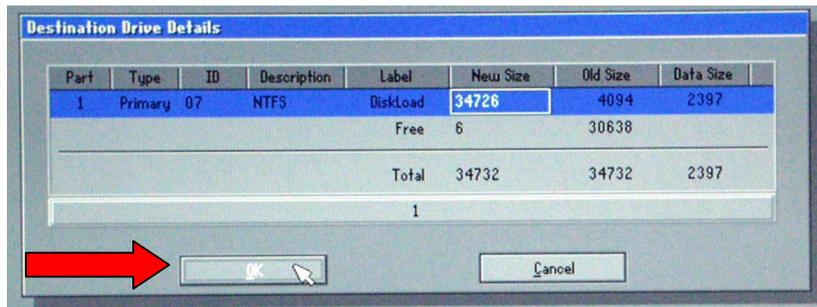


- At the Question: **Proceed with disk load? Destination drive will be permanently overwritten**, select **Yes**.

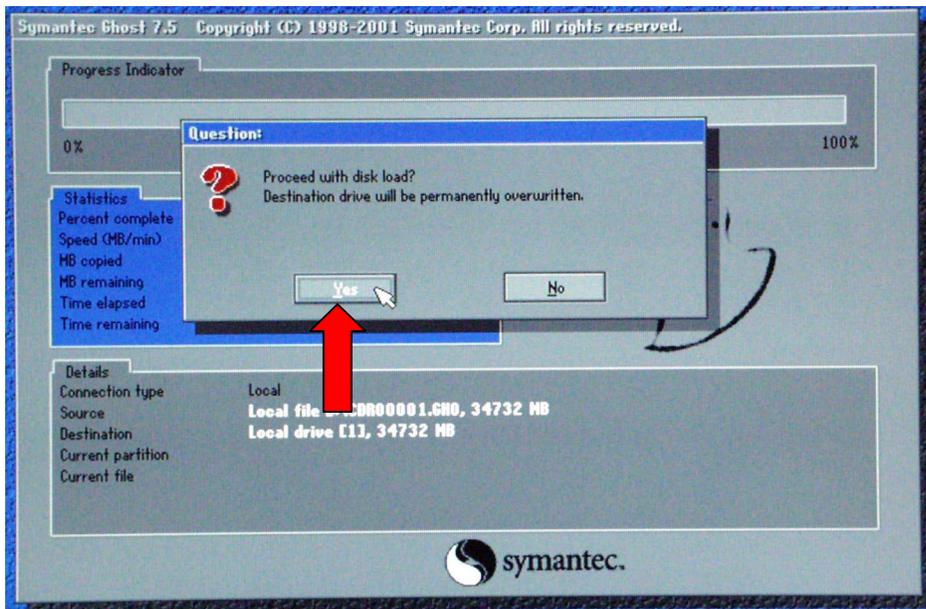

A progress screen displays:

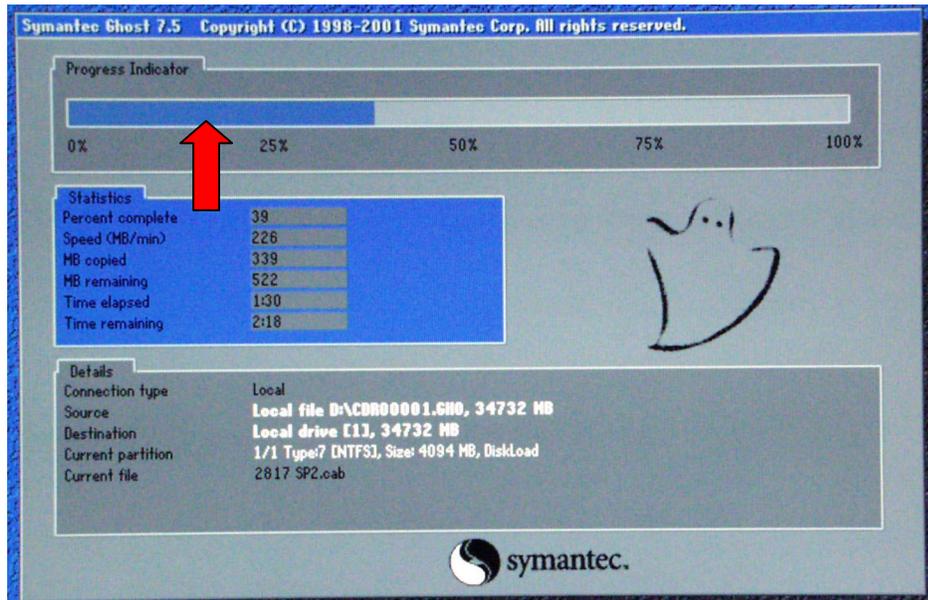

8. When the **Clone Complete** screen displays *eject the CD and floppy*. Click on **Reset Computer**.

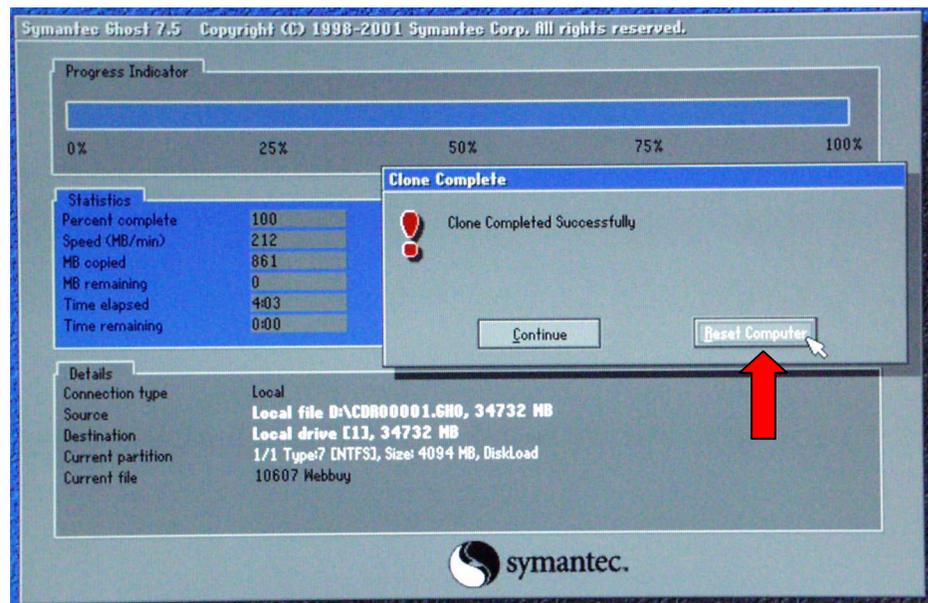

Customer Site Setup

1. After completing the previous instructions, and selecting **Reset Computer**, the system launches the **Welcome to Windows 2000 Setup Wizard**. Click on **Next**.
2. At the license window, select **I accept the agreement**, then click on **Next**.
3. At the **Personalizing your Software** window, enter the administrator's group name and organization (company). Click on **Next**.
4. Enter your **Product Key** in the spaces provided. Click on **Next**. (The Product Key license number is located with the Windows 2000 Server Software that came packaged with this kit.)
5. The computer name should be left unchanged unless you know the correct name. This name is determined by Windows 2000.

Important! The administrator password and confirmation should be *left blank*.


6. Click on **Next**.
7. Set the date and time, then click on **Next**.
8. Depending on your system configuration, the following **Welcome to the Found New Hardware Wizard** screen may display.

If it does display, continue with 8a – 8f. Otherwise, you are ready to load the MPS v3.0 application.

- a. At the **Welcome to the Found ...** screen, click **Next**.



- b. At the **Install Hardware Device Drivers** screen make sure the **Search for a suitable driver for my device** is selected. Then, click **Next**.

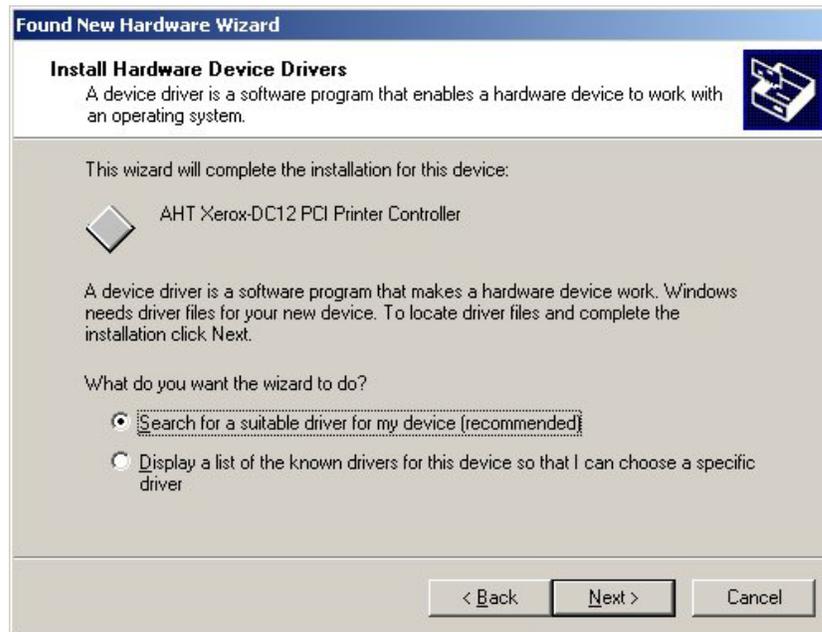

- c. At the **Locate Driver Files** screen, make sure **Specify a location** is selected, then click **Next**.




- d. At the **Found New Hardware Wizard** window, use the drop-down list box or browse to select **Copy manufacturer's files from: c:\AHT Drivers v3.0\DC12**. Then, click **OK**.



- e. At the **Driver Files Search Results** screen, click **Next**.



- f. At the **Completing the Found New Hardware Wizard** screen, click **Finish**.

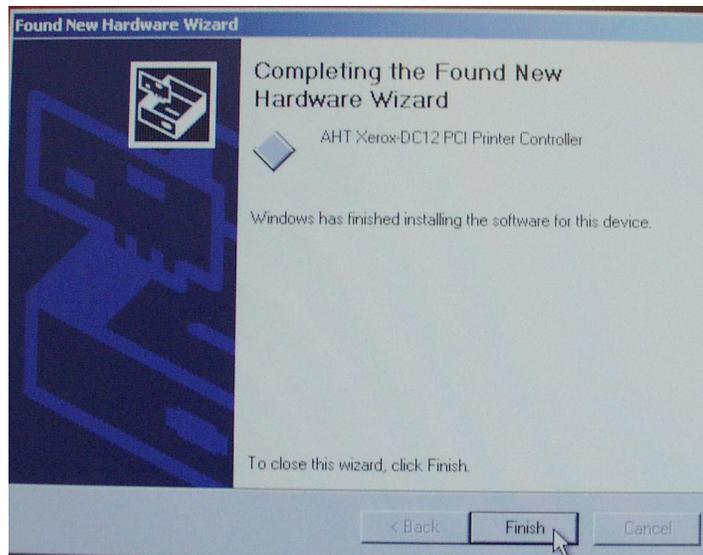

9. Reboot your system.

You are now ready to load the MPS v3.0 application. Refer to the **MPS v3.0 Installation Instructions**.

Technical Support

If you have any problems upgrading your system, contact technical support for assistance at 1-800-821-2797.