

Xerox VersaLink B71xx and C71xx Firmware Installation Instructions

Overview

The purpose of this document is to define the procedures for downloading device firmware to the Xerox® VersaLink® B71xx and C71xx products. This document contains procedures for installing firmware, via the device's Embedded Web Server.

Supported Products:

1. VersaLink B7125/B7130/B7135
2. VersaLink C7120/C7125/C7130

Methods Supported:

- Network (Ethernet) – Embedded Web Server
 - To obtain the IP Address of the device, print a Configuration Report.
 1. At the printer control panel, press the **Home** button.
 2. Touch Device > About > **Information Pages**.
 3. Touch **Configuration Report**.
 4. To return to the Home screen, press the **Home** button.

Prerequisites to Installing Firmware

- ✓ Before you download and install new software, determine the current software version installed on your printer.

Procedure to determine the firmware version from the Embedded Web Server:

- A. In the Embedded Web Server, click **System**.
- B. Click **Software Update**.
- C. In the Software Update area, view the Current Version.

Procedure to determine the firmware version at the printer control panel:

- A. At the printer control panel, press the **Home** button.
- B. Touch **Device > Software Update**.
- C. For Current Version, view the version number.

- ✓ Ensure the device is enabled to allow for Software Updates.

Procedure for Enabling Software Updates


- A. On a computer open a web browser and enter the Device's IP Address. Example: http://<IP Address>
- B. On the device's web page (Xerox Embedded Web Server) Login as a system administrator.
- C. Select **Log In**.
- D. Enter user name and password
- E. Click [**Log In**].

Note: The default user name is admin and default password is 1111.


- F. Once logged in, select Home > System > Software Update > [**Enable**].
- G. Select [**Restart Now**] to reboot the device.

Procedure for using Device's Embedded Web Server (VersaLink models only)

1. Download the *.bin firmware file and put it in a directory that can be browsed to.
2. On a computer open a web browser and enter the Device's IP Address. Example: http://<IP Address>
3. On the device's web page (Xerox Embedded Web Server) Login as a system administrator.
4. Select [**Log In**]. Enter the admin user name and password. Click [**Log In**].
5. Select **System** > **Software Update**.

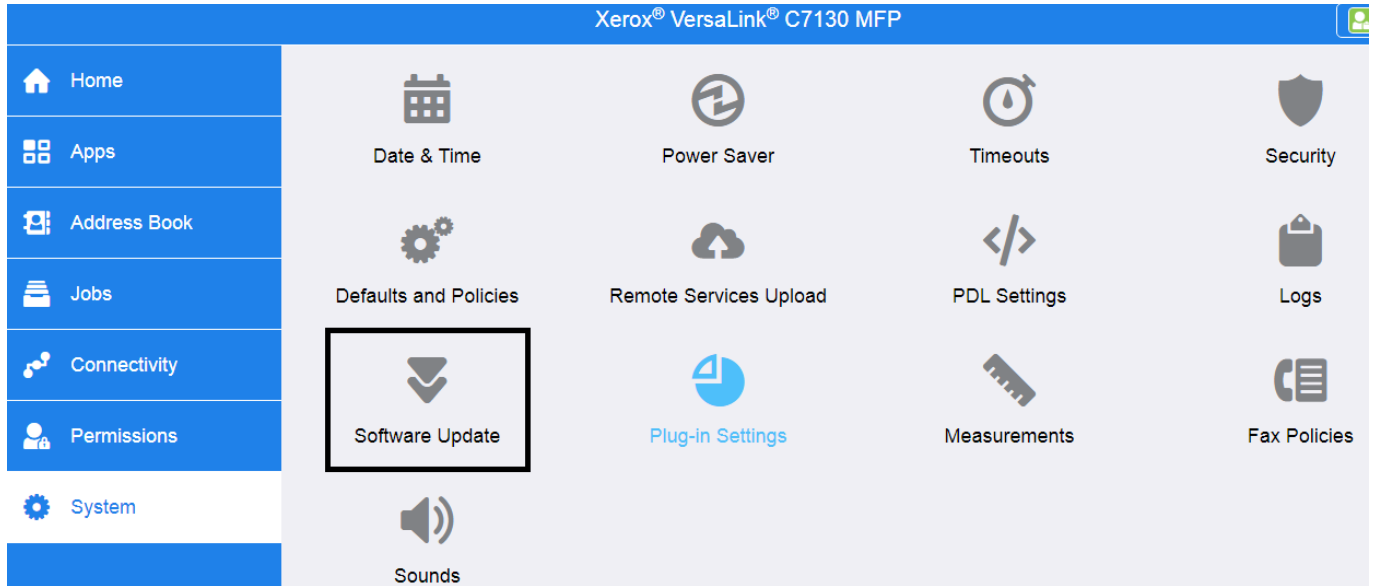

6. Browse for the firmware file (*.bin) by clicking **Select**.
7. Navigate to the location where you downloaded the file, then select the .bin file.
8. Select **Install Now**.

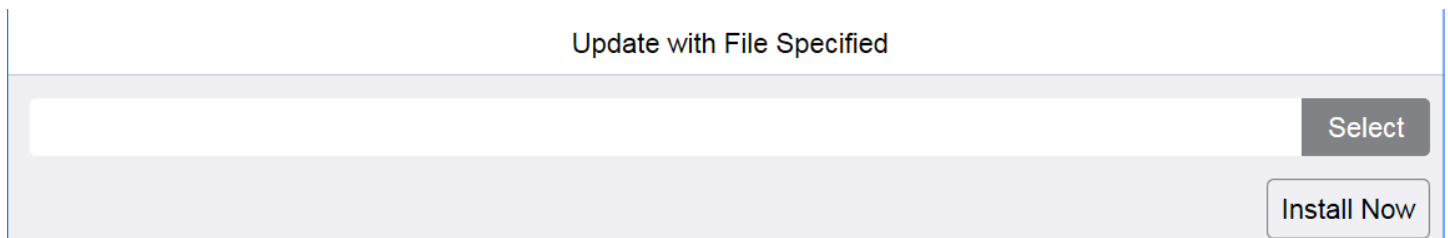

Notes:

- Software installation begins several minutes after you submit the software to the printer.
- When installation begins, the Embedded Web Server is disabled.
- When the installation completes, the printer restarts and prints a Software Upgrade Report.